Comment on: *Characterization of subthreshold voltage fluctuations in neuronal membranes* by M. Rudolph and A. Destexhe

Benjamin Lindner and André Longtin

Department of Physics, University of Ottawa
150 Louis Pasteur, Ottawa, KIN 6N5, Canada

arXiv:q-bio/0501038v2 [q-bio.NC] 15 Jun 2005

Abstract

In two recent papers, Rudolph and Destexhe (Neural Comp. **15**, 2577-2618, 2003; Neural Comp. in press, 2005) studied a leaky integrator model (i.e. an RC-circuit) driven by correlated ("colored") Gaussian conductance noise and Gaussian current noise. In the first paper they derived an expression for the stationary probability density of the membrane voltage; in the second paper this expression was modified to cover a larger parameter regime. Here we show by standard analysis of solvable limit cases (white-noise limit of additive and multiplicative noise sources; only slow multiplicative noise; only additive noise) and by numerical simulations that their first result does not hold for the general colored-noise case and uncover the errors made in the derivation of a Fokker-Planck equation for the probability density. Furthermore, we demonstrate analytically (including an exact integral expression for the time-dependent mean value of the voltage) and by comparison to simulation results, that the extended expression for the probability density works much better but still does not solve exactly the full colored-noise problem. We also show that at stronger synaptic input the stationary mean value of the linear voltage model may diverge and give an exact condition relating the system parameters for which this takes place.

1 Introduction

The inherent randomness of neural spiking has stimulated the exploration of stochastic neuron models for several decades (Holden, 1976; Tuckwell, 1988, 1989). The subthreshold membrane voltage of cortical neurons shows strong fluctuations *in vivo* caused mainly by synaptic stimuli coming from as many as tens of thousands of presynaptic neurons. In the theoretical literature these stimuli have been approximated in different ways. The most biophysically realistic description is to model an extended neuron with different sorts of synapses distributed over the dendrite and possibly the soma, with each synapse following its own kinetics when excited by random incoming pulses that change the local conductance. In a "point-neuron" model for the membrane potential in the spike generating zone, this amounts to an effective conductance noise for each sort of synapse. If the contribution of a single spike is small and the effective input rates are high, the incoming spike trains can be well approximated by Gaussian white noise; this is known as the diffusion approximation of spike train input (see, e.g. Holden, 1976). Furthermore, these conductance fluctuations driving the membrane voltage dynamics will be correlated in time (the noise will be "colored") due to the synaptic filtering (Brunel and Sergi, 1998). Assuming the validity of the diffusion approximation, two further common approximations found in the theoretical literature are (1) to replace the conductance noise by a current noise; and (2) to neglect the correlation of the noise and to use a white noise. To explore the validity of these approximations has been the aim of a number of recent theory papers (Rudolph and Destexhe, 2003; Richardson, 2004; Richardson and Gerstner, 2005; Rudolph and Destexhe, 2005).

Rudolph and Destexhe (2003) (in the following abbreviated by R&D) recently studied the subthreshold voltage dynamics driven by colored Gaussian conductance and current noises, with the goal of deriving analytical expressions for the probability density of the voltage fluctuations in the absence of a spike-generating mechanism. Such expressions are desirable because they permit to use experimentally measured voltage traces in vivo to determine (or at least to obtain constraints on) synaptic parameters. R&D gave a one-dimensional Fokker-Planck equation for the evolution of the probability density of the voltage variable and solved this equation in the stationary state. Comparing this solution to results of numerical simulations they found a good agreement to simulations of the full model. In a recent Note, however, they discovered a disagreement of their formula to simulations in extreme parameter regimes. R&D proposed an extended expression that is functionally equivalent to their original formula; it results from effective correlation times that were introduced into their original formula in a heuristic manner. According to R&D this new expression fits simulation results well for various parameter sets.

In this comment we show that both proposed formulas are not exact solutions of the mathematical problem posed by R&D. We demonstrate this by the analysis of limit cases, by means of an exact analytical result for the mean value of the voltage as well as by numerical simulation results. The failure of the first formula is pronounced, e.g. it fails, for instance, dramatically if the synaptic correlation times are varied by only one order of magnitude relative to R&D's standard parameters. However, the extended expression, although not an exact solution of the problem, seems to provide a reasonable approximation for the probability density of the membrane voltage if the conductance noise is not too strong. We also show that if the conductance noise is strong, the model itself and not only the solutions proposed by R&D becomes problematic: the moments of the voltage, e.g. its stationary mean value, diverge. For the mean value we will give an exact solution and identify by means of this solution the parameters for which a divergence is observed.

This paper is organized as follows. In the next section, we introduce the model which was studied by R&D. In the following sections we study the limit cases of only white noise (section 3), of only additive colored noise (section 4), and of slow ("static") multiplicative noise (section 5). In section 6 we derive expressions for the time-dependent and for the stationary mean value of the voltage at arbitrary values of the correlation times. Sec. 7 is devoted to a comparison of numerical simulations to the various theoretical formulas. We summarize and discuss our findings in section 8. In the appendix A we uncover the errors in the derivation of the Fokker-Planck equation made by R&D. We anticipate that our results will help future investigations of the neural colored noise problem.

2 Basic model

The current balance equation for a patch of passive membrane is

$$C_m \frac{dV(t)}{dt} = -g_L(V(t) - E_L) - \frac{1}{a} I_{syn}(t) \tag{1}$$

where C_m is the specific membrane capacity, a is the membrane area, and g_L and E_L the leak conductance and reversal potential, respectively. The total synaptic current is given by

$$I_{syn} = g_e(t)(V(t) - E_e) + g_i(t)(V(t) - E_i) - I(t) \tag{2}$$

with $g_{e,i}$ being the noisy conductances for excitatory and inhibitory synapses and $E_{e,i}$ the respective reversal potentials; $I(t)$ is an additional noisy current. With respect to the conductances, R&D assume the diffusion approximation to be valid. This means to approximate the superposition of incoming presynaptic spikes at the excitatory and inhibitory synapses by Gaussian white noise. Including a first-order linear synaptic filter, the conductances are consequently described by Ornstein-Uhlenbeck processes (OUP); similarly, R&D also assume an Ornstein-Uhlenbeck process for the current $I(t)$

$$\begin{aligned} \frac{dg_e(t)}{dt} &= -\frac{1}{\tau_e}(g_e(t) - g_{e0}) + \sqrt{\frac{2\sigma_e^2}{\tau_e}}\xi_e(t), & (3) \\ \frac{dg_i(t)}{dt} &= -\frac{1}{\tau_i}(g_i(t) - g_{i0}) + \sqrt{\frac{2\sigma_i^2}{\tau_i}}\xi_i(t), & (4) \\ \frac{dI(t)}{dt} &= -\frac{1}{\tau_I}(I(t) - I_0) + \sqrt{\frac{2\sigma_I^2}{\tau_I}}\xi_I(t). & (5) \end{aligned}$$

Here the functions $\xi_{e,i,I}(t)$ are independent Gaussian white noise sources with $\langle \xi_k(t)\xi_l(t')\rangle = \delta_{k,l}\delta(t-t')$ (here $k, l \in \{e, i, I\}$ and the brackets $\langle \cdots \rangle$ stand for a stationary ensemble average). The processes g_e, g_i, and I are Gaussian distributed around the mean values g_{e0}, g_{i0}, and I_0 with variances σ_e^2, σ_i^2, and σ_I^2, respectively

$$\rho_e(g_e) = \frac{1}{\sqrt{2\pi\sigma_e^2}} \exp\left[-(g_e - g_{e0})^2/(2\sigma_e^2)\right], \tag{6}$$

$$\rho_i(g_i) = \frac{1}{\sqrt{2\pi\sigma_i^2}} \exp\left[-(g_i - g_{i0})^2/(2\sigma_i^2)\right], \tag{7}$$

$$\rho_I(I) = \frac{1}{\sqrt{2\pi\sigma_I^2}} \exp\left[-(I - I_0)^2/(2\sigma_I^2)\right]. \tag{8}$$

As discussed by R&D, these solutions permit unphysical negative conductances which become especially important if g_{e0}/σ_e and g_{i0}/σ_i are small.

Furthermore, the three processes are exponentially correlated with the correlation times given by τ_e, τ_i, and τ_I, respectively

$$\langle (g_e(t) - g_{e0})(g_e(t+\tau) - g_{e0})\rangle = \sigma_e^2 \exp[-|\tau|/\tau_e], \tag{9}$$

$$\langle (g_i(t) - g_{i0})(g_i(t+\tau) - g_{i0})\rangle = \sigma_i^2 \exp[-|\tau|/\tau_i], \tag{10}$$

$$\langle (I(t) - I_0)(I(t+\tau) - I_0)\rangle = \sigma_I^2 \exp[-|\tau|/\tau_I]. \tag{11}$$

Note that R&D used another parameter to quantify the strength of the noise processes, namely $D_{\{e,i,I\}} = 2\sigma_{e,i,I}^2/\tau_{e,i,I}$. Here we will not follow this unusual scaling[1] but consider variations of the correlation times at either fixed variance $\sigma_{e,i,I}^2$ of the OUPs or fixed noise intensities $\sigma_{e,i,I}^2\tau_{e,i,I}$.

Eq. (1) can be looked upon as a one-dimensional dynamics driven by multiplicative and additive colored noises. Equivalently, it can be together with eq. (3), eq. (4), and eq. (5) regarded as a four-dimensional nonlinear dynamical system driven by only additive white noise. For such a process it is in general quite difficult to calculate the statistics, such as the stationary probability density $P_0(V, g_e, g_i, I)$ or the stationary marginal density for the driven variable $\rho(V) = \int\int\int dg_e dg_i dI P_0(V, g_e, g_i, I)$ unless so-called potential conditions are met (see, e.g. (Risken, 1984)). It can be easily shown that the above problem does not fulfill these potential conditions, and no solution has yet been found.

R&D have proposed a solution for the stationary marginal density of the membrane voltage $\rho(V)$ for colored noises of *arbitrary correlation times* driving their system. Their solution for the stationary probability of the membrane voltage reads

$$\begin{aligned}\rho_{RD}(V) = N \exp\Bigg[&\frac{a_1}{2b_2}\ln(b_2V^2 + b_1V + b_0) + \\ &\frac{2b_2a_0 - a_1b_1}{b_2\sqrt{4b_2b_0 - b_1^2}} \arctan\left(\frac{2b_2V + b_1}{\sqrt{4b_2b_0 - b_1^2}}\right)\Bigg]\end{aligned} \tag{12}$$

with N being the normalization constant and with the abbreviations

$$\begin{aligned}
a_0 &= \frac{1}{(C_m a)^2}(2C_m a(g_L E_L a + g_{e0}E_e + g_{i0}E_i) + I_0 C_m a + \sigma_e^2\tau_e E_e + \sigma_i^2\tau_i E_i), \\
a_1 &= -\frac{1}{(C_m a)^2}(2C_m a(g_L a + g_{e0} + g_{i0}) + \sigma_e^2\tau_e + \sigma_i^2\tau_i), \\
b_0 &= \frac{1}{(C_m a)^2}(\sigma_e^2\tau_e E_e^2 + \sigma_i^2\tau_i E_i^2 + \sigma_I^2\tau_I), \\
b_1 &= -\frac{2}{(C_m a)^2}(\sigma_e^2\tau_e E_e + \sigma_i^2\tau_i E_i), \\
b_2 &= \frac{1}{(C_m a)^2}(\sigma_e^2\tau_e + \sigma_i^2\tau_i).
\end{aligned} \tag{13}$$

---

[1] In general, two different intensity scalings for an OUP $\eta(t)$ are used in the literature (see, e.g. Hänggi and Jung, 1995)

1. fixing the noise intensity $Q = \int_0^\infty dT\langle\eta(t)\eta(t+T)\rangle = \sigma^2\tau$, allowing for a proper white-noise limit by letting τ approach zero; with fixed noise intensity and $\tau \to \infty$ (static limit), the effect of the OUP vanishes, since the variance of the process tends to zero
2. fixing the noise variance σ^2 which leads to a finite effect of the noise for $\tau \to \infty$ (static limit) but makes the noise effect vanish as $\tau \to 0$

R&D use functions $\alpha_{\{e,i,I\}}(t)$, the long-time limit of which is proportional to the noise intensity $\sigma_{e,i,I}^2\tau_{e,i,I}$.

In a subsequent Note on their paper Rudolph and Destexhe (2005), R&D considered the case of only multiplicative colored noise ($\sigma_I = 0$) and showed that the solution eq. (12) does not fit numerical simulations for certain parameter regimes. They claim that this disagreement is due to a filtering problem not properly taken into account in their previous work. They proposed a new solution for the case of only multiplicative noise that is functionally equivalent to eq. (12) for $\sigma_I = 0$ but simply replaces correlation times by effective correlation times

$$\tau'_{e,i} = \frac{2\tau_{e,i}\tau_0}{\tau_e + \tau_0}. \tag{14}$$

where $\tau_0 = aC_m/(ag_L + g_{e0} + g_{i0})$. Explicitely, this *extended expression* is given by

$$\begin{aligned}\rho_{RD,ext}(V) \quad = \quad & N' \exp\left[A_1 \ln\left(\frac{\sigma_e^2\tau'_e}{(C_m a)^2}(V-E_e)^2 + \frac{\sigma_i^2\tau'_i}{(C_m a)^2}(V-E_i)^2\right) + \right. \\ & \left. A_2 \arctan\left(\frac{\sigma_e^2\tau'_e(V-E_e) + \sigma_i^2\tau'_i(V-E_i)}{(E_e-E_i)\sqrt{\sigma_e^2\tau'_e\sigma_i^2\tau'_i}}\right)\right] \end{aligned} \tag{15}$$

with the abbreviations

$$A_1 \quad = \quad -\frac{2C_m a(g_{e0}+g_{i0}) + 2C_m a^2 g_L + \sigma_e^2\tau'_e + \sigma_i^2\tau'_i}{2(\sigma_e^2\tau'_e + \sigma_i^2\tau'_i)} \tag{16}$$

$$A_2 \quad = \quad \frac{g_L a(\sigma_e^2\tau'_e(E_L-E_e) + \sigma_i^2\tau'_i(E_L-E_i)) + (g_{e0}\sigma_i^2\tau'_i - g_{i0}\sigma_e^2\tau'_e)(E_e-E_i)}{(E_e-E_i)\sqrt{\sigma_e^2\tau'_e\sigma_i^2\tau'_i}(\sigma_e^2\tau'_e + \sigma_i^2\tau'_i)/(2C_m a)}. \tag{17}$$

The introduction of the effective correlation times was justified by considering the effective-time constant (ETC) or Gaussian approximation from Richardson (2004) (see below) which reduces the system to one with additive noise. The new formula eq. (15) fits well their simulation results for various combinations of parameters (Rudolph and Destexhe, 2005).

In this comment, we will show that neither of these formulas yields the exact solution of the mathematical problem. As we will show first, the original formula fails significantly outside the limited parameter range investigated in R&D 2003 . Apparently, the second formula provides a good fit formula for a number of parameter sets. It also reproduces two of the simple limit cases, in which the first formula fails. By means of the third limit case as well as of an exact solution for the stationary mean value (derived in section 6, we can, however, show that the new formula is not an exact result either.

To demonstrate the invalidity of the first expression in the general case, we will show that eq. (12) fails in three limits that are tractable by standard techniques: (1) the white noise limit of all three colored noise sources, i.e. keeping the noise intensities $\sigma_{e,i,I}^2\tau_{e,i,I}$ fixed and letting all noise correlation times tend to zero $\tau_{e,i} \to 0$; (2) the case of additive colored noise only; (3) the limit of large $\tau_{e,i}$ in the case of multiplicative colored noises with fixed variances σ_e^2 and σ_i^2. In all cases, we also ask whether mean and variance can be expected to be finite as it has been tacitly assumed by R&D.

We will also compare both solutions proposed by R&D as well as our own analytical results for the limit cases to numerical simulation results. While the failure of the first formula eq. (12) is pronounced except for a small parameter regime, deviations of the extended expression eq. (15) are much smaller and for six different parameter sets inspected, the new formula can be at least regarded as a good approximation. Parameters can be found, however, where deviations of this new formula from numerical simulations become more serious.

To simplify the notation we will use the new variable $v = V - \Delta$ with

$$\Delta = \frac{g_L a E_L + g_{e0}E_e + g_{i0}E_i + I_0}{g_L a + g_{e0} + g_{i0}}. \tag{18}$$

Then the equations can be recast into

$$\dot{v} \quad = \quad -\beta v - y_e(v - V_e) - y_i(v - V_i) + y_I \tag{19}$$

$$\dot{y}_{e,i,I} \quad = \quad -\frac{y_{e,i,I}}{\tau_{e,i,I}} + \sqrt{\frac{2\tilde{\sigma}_{e,i,I}^2}{\tau_{e,i,I}}}\xi_{e,i,I}(t) \tag{20}$$

with the abbreviations

$$\begin{aligned} \beta &= \frac{g_L a + g_{e0} + g_{i0}}{aC_m}, && (21)\\ V_{e,i} &= E_{e,i} - \Delta, && (22)\\ \tilde{\sigma}_{e,i,I} &= \sigma_{e,i,I}/(aC_m). && (23) \end{aligned}$$

Once we have found an expression for the probability density of v, the density for the original variable V is given by the former density taken at $v = (V - \Delta)$.

Finally, we briefly explain the *effective-time constant* (ETC) or *Gaussian* approximation (cf. Richardson (2004); Richardson and Gerstner (2005) and references therein) which we will refer to later on. Assuming weak noise sources, the voltage will fluctuate around the deterministic equilibrium value $v = 0$ with an amplitude proportional to the square root of the sum of the noise variances, e.g. for only excitatory conductance fluctuations we would have a proportionality to the standard deviation of y_e, i.e. $\langle |v| \rangle \propto \sqrt{\langle y_e^2 \rangle}$. From this we can see that the multiplicative terms $y_e V$ and $y_I V$ make a contribution proportional to the squares of the standard deviations and can therefore be neglected for weak noise. The resulting dynamics contains only additive noise sources

$$\dot{v} = -\beta v + y_e V_e + y_i V_i + y_I. \tag{24}$$

The stationary probability density is a Gaussian

$$\rho_{ETC}(v) = \frac{\exp[-v^2/(2\langle v^2 \rangle_{ETC})]}{\sqrt{2\pi \langle v^2 \rangle_{ETC}}} \tag{25}$$

with zero mean and a variance given by (Richardson, 2004)

$$\langle v^2 \rangle_{ETC} = V_e^2 \frac{\sigma_e^2 \tau_e/\beta}{1 + \beta\tau_e} + V_i^2 \frac{\sigma_i^2 \tau_i/\beta}{1 + \beta\tau_i} + \frac{\sigma_I^2 \tau_I/\beta}{1 + \beta\tau_I} \tag{26}$$

The solution takes into account the effect of the mean conductances on the effective membrane time constant $1/\beta$ through eq. (21).

3 The white-noise limit

If we fix the noise intensities

$$Q_{e,i,I} = \tilde{\sigma}_{e,i,I}^2 \tau_{e,i,I}, \tag{27}$$

we may consider the limit of white noise by letting $\tau_{e,i,I} \to 0$. A special case of this has been recently considered by Richardson (2004) with $\sigma_I = 0$ (only multiplicative noise is present).

In the white-noise limit, the three OUPs approach mutually independent white-noise sources

$$y_e \to \sqrt{2Q_e}\xi_e(t), \quad y_i \to \sqrt{2Q_i}\xi_i(t), \quad y_I \to \sqrt{2Q_I}\xi_I(t) \tag{28}$$

and, thus the current balance equation eq. (19) becomes

$$\dot{v} = -\beta v - \sqrt{2Q_e}(v - V_e)\xi_e(t) - \sqrt{2Q_i}(v - V_i)\xi_i(t) + \sqrt{2Q_I}\xi_I(t) \tag{29}$$

which is equivalent[2] to a driving by a single Gaussian noise $\xi(t)$

$$\dot{v} = -\beta v + \sqrt{2Q_e(v - V_e)^2 + 2Q_i(v - V_i)^2 + 2Q_I}\xi(t) \tag{30}$$

---

[2] The sum of three independent Gaussian noise sources gives one Gaussian noise the variance of which equals the sum of the variances of the single noise sources.

with $\langle \xi(t)\xi(t')\rangle = \delta(t-t')$. Since we approach the white noise limit with having in mind colored noises with negligible correlation times, eq. (30) has to be interpreted in the sense of Stratonovich (Risken, 1984; Gardiner, 1985, see sec. 6.5). The drift and diffusion coefficients then read (Risken, 1984, cf. (3.95) therein)

$$\begin{aligned} D^{(1)} &= -\beta v + Q_e(v-V_e) + Q_i(v-V_i) = -\beta v + \frac{1}{2}\frac{dD^{(2)}}{dv} && (31) \\ D^{(2)} &= Q_I + Q_e(v-V_e)^2 + Q_i(v-V_i)^2 && (32) \end{aligned}$$

and the stationary solution of the probability density is given by (Risken, 1984, cf. eq. (5.13) therein)

$$\rho_{wn}(v) = N \exp\left[-\ln(D^{(2)}) + \int^{v} dx \frac{D^{(1)(x)}}{D^{(2)(x)}} \right] \tag{33}$$

where the subscript "wn" refers to white noise.

After carrying out the integral, the solution can be written as follows

$$\begin{aligned} \rho_{wn}(v) = N \exp\Bigg[&-\frac{\beta+\tilde{b}_2}{2\tilde{b}_2} \ln(\tilde{b}_2 v^2 + \tilde{b}_1 v + \tilde{b}_0) + \\ &\frac{\beta \tilde{b}_1}{\tilde{b}_2\sqrt{4\tilde{b}_0\tilde{b}_2 - \tilde{b}_1^2}} \arctan\left(\frac{2\tilde{b}_2 v + \tilde{b}_1}{\sqrt{4\tilde{b}_0\tilde{b}_2 - \tilde{b}_1^2}} \right) \Bigg] \end{aligned} \tag{34}$$

with the abbreviations

$$\begin{aligned} \tilde{b}_0 &= Q_I + Q_e V_e^2 + Q_i V_i^2 && (35) \\ \tilde{b}_1 &= -2(Q_e V_e + Q_i V_i) && (36) \\ \tilde{b}_2 &= Q_e + Q_i && (37) \end{aligned}$$

Different versions of the white-noise case have been discussed and also analytically studied in the literature (see, e.g., Hanson and Tuckwell, 1983; Lánský and Lánská, 1987; Lánská et al., 1994; Richardson, 2004). In particular, eq. (34) is consistent with the expression for the voltage density in a leaky integrate-and-fire neuron driven by white noise[3] given by Richardson (2004).

Since eq. (12) was proposed by R&D as the solution for the probability density at arbitrary correlation times of the colored-noise sources, it should be also valid in the white-noise limit and agree with eq. (34). On closer inspection it becomes apparent that both eq. (12) and eq. (15) have the structure of the white-noise solution eq. (34). Comparing the factors of the terms in the exponential, we find that the first solution (in terms of the shifted voltage variable and using the noise intensities eq. (27)) can be written as follows

$$\rho_{RD}(v, Q_e, Q_i, Q_I) = \rho_{wn}(v, Q_e/2, Q_i/2, Q_I/2), \tag{38}$$

where the additional arguments of the functions indicate the parametric dependence of the densities on the noise intensities. According to eq. (38), if formulated in terms of the noise intensities (and not the noise variances) the first formula proposed by R&D does not depend on the correlation times $\tau_{e,i,I}$ at all. *Furthermore, it is evident from eq. (38) that the expression is incorrect in the white noise limit.* If all correlation times $\tau_{e,i,I}$ simultaneously go to zero, the density approaches the white-noise solution with only half of the true values of the noise intensities. The density will certainly depend on the noise intensities and will change if one uses only half of their values.

We may also rewrite R&D's extended expression eq. (15) in terms of the white-noise density

$$\rho_{RD,ext}(v, Q_e, Q_i) = \rho_{wn}(v, Q_e/(1+\beta\tau_e), Q_i/(1+\beta\tau_i), Q_I = 0) \tag{39}$$

---

[3] The density eq. (34) results from eq. (18) in Richardson (2004) when firing and reset in the integrate-and-fire neuron become negligible. This can be formally achieved by letting threshold and reset voltage go to positive infinity.

This solution agrees with the original solution by R&D only for the specific parameter set

$$\tau_e = \tau_i = 1/\beta. \tag{40}$$

We note that since the extended solution can be expressed by means of the white-noise density it makes sense to describe the extended expression by means of effective noise intensities

$$Q'_{e,i} = \frac{Q_{e,i}}{1+\beta\tau_{e,i}} \tag{41}$$

rather than in terms of the effective correlation times $\tau'_{e,i}$ (cf. eq. (14)) used by R&D. The assertion behind eq. (39) is the following: the probability density of the membrane voltage is always equivalent to the white-noise density; correlations in the synaptic input (i.e. finite values of $\tau_{e,i,I}$) just lead to rescaled (smaller) noise intensities $Q'_{e,i}$ given in eq. (41).

If we consider the white-noise limit of the r.h.s. of eq. (39), we find that the extended expression eq. (15) reproduces this limit, i.e.

$$\lim_{\tau_e,\tau_i\to 0} \rho_{RD,ext}(V, Q_e, Q_i) = \rho_{wn}(V, , Q_e, Q_i, Q_I = 0). \tag{42}$$

So there is no problem with the extended expression in the white-noise limit.

3.1 Divergence of moments in the white-noise limit and in R&D's expressions for the probability density

We consider the density eq. (34) in the limits $v \to \pm\infty$ and conclude whether the moments and, in particular, the mean value of the white-noise density are finite; similar arguments will be applied to the solutions proposed by R&D. At large v and to leading order in $1/v$ we obtain

$$\rho_{wn}(v) \sim |v|^{-\frac{\beta+\tilde{b}_2}{\tilde{b}_2}} N \tilde{b}_2^{-\frac{\beta+\tilde{b}_2}{2\tilde{b}_2}} \exp\left[\pm \frac{\beta \tilde{b}_1}{\tilde{b}_2\sqrt{4\tilde{b}_0\tilde{b}_2 - \tilde{b}_1^2}} \frac{\pi}{2}\right] \quad \text{as} \quad v \to \pm\infty. \tag{43}$$

When calculating the nth moment, we have to multiply with v^n and obtain a non-diverging integral only if $v^n \rho_{wn}(v)$ decays faster than v^{-1}. This is the case only if $n - (\beta + \tilde{b}_2)/\tilde{b}_2 < -1$ or using eq. (37)

$$|\langle v^n \rangle_{wn}| < \infty \;\text{ iff }\; \beta > n(Q_e + Q_i) \tag{44}$$

where "iff" stands for "if and only if" and the index "wn" indicates that we consider the white-noise case. Note that no symmetry argument applies for odd n since the asymptotic limits differ for ∞ and $-\infty$ according to eq. (43). For the mean, this implies that

$$|\langle v \rangle_{wn}| < \infty \;\text{ iff }\; \beta > Q_e + Q_i \tag{45}$$

otherwise the integral diverges.

In general, the power law tail in the density is a hint that (for white noise at least) we face the problem of rare strong deviations in the voltage, that are due to the specific properties of the model (multiplicative Gaussian noise).

Because of eq. (38) similar conditions (differing by a prefactor of 1/2 on the respective right hand sides) also apply for the finiteness of the mean and variance of the original solution eq. (12) proposed by R&D. For the mean value of this solution one obtains the condition

$$|\langle v \rangle_{RD}| < \infty \;\text{ iff }\; \beta > \frac{Q_e + Q_i}{2}, \tag{46}$$

which should hold true in the general colored noise case but does not agree with the condition in eq. (45) even in the white-noise case.

From the extended expression we obtain

$$|\langle v \rangle_{RD,ext}| < \infty \;\text{ iff }\; \beta > \frac{Q_e}{1+\beta\tau_e} + \frac{Q_i}{1+\beta\tau_i}. \tag{47}$$

Note that eq. (47) agrees with eq. (45) only in the white-noise case (i.e. for $\tau_e, \tau_i \to 0$). Below we will show that eq. (45) gives the correct condition for a finite mean value in the general case of arbitrary correlation times, too. Since for finite τ_e, τ_i, the two conditions eq. (45) and eq. (47) differ, we can already conclude that the eq. (15) that led to condition eq. (47) cannot be the exact solution of the original problem.

4 Additive colored noise

Setting the multiplicative colored noise sources to zero, R&D obtain an expression for the marginal density in case of additive colored noise only (cf. eq. (3.7-3.9) in R&D)

$$\rho_{add,RD}(V) = N \exp\left[-\frac{a^2 g_L C_m (V - E_L - I_0/(g_L a))^2}{\sigma_I^2 \tau_I}\right] \tag{48}$$

which corresponds in our notation and in terms of the shifted variable v to

$$\tilde{\rho}_{add,RD}(v) = N \exp\left[-\frac{\beta v^2}{Q_I}\right] \tag{49}$$

Evidently, once more a factor 2 is missing already in the white-noise case (where the process $v(t)$ itself becomes an Ornstein-Uhlenbeck process), since for an OUP we should have $\rho \sim \exp[-\beta v^2/(2Q_I)]$. However, there is also a missing additional dependence on the correlation time.

For additive noise only, the original problem given in eq. (1) reduces to

$$\begin{aligned} \dot{v} &= -\beta v + y_I, && (50)\\ \dot{y_I} &= -\frac{1}{\tau_I} y_I + \frac{\sqrt{2Q_I}}{\tau_I}\xi_I(t). && (51) \end{aligned}$$

This system is mathematically similar to the Gaussian approximation or effective-time constant approximation eq. (25) in which also no multiplicative noise is present. The density function for the voltage is well known; for the sake of clarity we show here how to calculate it.

The system eqs. (50,51) obeys the two-dimensional Fokker-Planck equation

$$\partial_t P(v, y_I, t) = \left[\partial_v(\beta v - y_I) + \partial_{y_I}\left(\frac{y_I}{\tau_I} + \frac{Q_I}{\tau_I^2}\partial_{y_I}\right)\right] P(v, y_I, t) \tag{52}$$

The stationary problem ($\partial_t P_0(v, y_I) = 0$) is solved by an ansatz $P_0(v, y) \sim \exp[Av^2 + Bvy + Cy^2]$ yielding the solution for the full probability density

$$P_0(v, y_I) = N \exp\left[\frac{c}{2}\left(y_I^2 - 2\beta v y_I - \frac{Q_I \beta}{\tau_I^2} c v^2\right)\right], \quad c = -\frac{\tau_I(1 + \beta\tau_I)}{Q_I} \tag{53}$$

Integrating over y_I, yields the correct marginal density

$$\rho_{add}(v) = \sqrt{\frac{\beta(1 + \beta\tau_I)}{2\pi Q_I}} \exp\left[-\frac{\beta v^2}{2Q_I}(1 + \beta\tau_I)\right] \tag{54}$$

which is in disagreement with eq. (49) and hence also with eq. (48). From the correct solution given in eq. (54), we also see what happens in the limit of infinite τ for fixed noise intensity Q_I: the exponent tends to minus infinity except at $v = 0$ or, put differently, the variance of the distribution tends to zero and we end up with a δ function at $v = 0$. This limit makes sense (cf. footnote 1) but is not reflected at all in the original solution eq. (15) given by R&D.

We can also rewrite the solution in terms of the white-noise solution in the case of vanishing multiplicative noise

$$\rho_{add}(v) = \rho_{wn}(v, Q_e = 0, Q_i = 0, Q_I/[1 + \beta\tau_I]). \tag{55}$$

Thus, for the additive noise is true, what has been assumed by R&D in the case of multiplicative noise: the density in the general colored-noise case is given by the white-noise density with a rescaled noise intensity $Q_I' = Q_I/[1 + \beta\tau_I]$

(or equivalently, rescaled correlation time $\tau_I' = 2\tau_I/[1+\beta\tau_I]$ in eq. (49) with $Q_I = \sigma^2\tau_I'$).

We cannot perform the limit of only additive noise in the extended expression eq. (15) proposed by R&D because this solution was meant for the case of only multiplicative noise. If, however, we generalize the solution eq. (15) to the case of additive and multiplicative colored noises, we can consider the limit of only additive noise in this solution. This is done by taking the original solution by R&D eq. (12) and replacing not only the correlation times of the multiplicative noises $\tau_{e,i}$ by the effective ones $\tau_{e,i}'$ but also that of the additive noise τ_I by an effective correlation time

$$\tau_I' = \frac{2\tau_I}{1+\tau_I\beta}. \tag{56}$$

If we now take the limit $Q_e = Q_i = 0$, we obtain the correct density

$$\rho_{rud,ext,add}(v) = \rho_{wn}(v, Q_e = 0, Q_i = 0, Q_I/[1+\beta\tau_I]) \tag{57}$$

as becomes evident on comparing the r.h. sides of eq. (57) and eq. (55).

Finally, we note that the case of additive noise is the only limit that does not pose any condition on the finiteness of the moments.

5 Static multiplicative noises only (limit of large $\tau_{e,i}$)

Here we assume for simplicity $\tilde{\sigma}_I = 0$ and consider multiplicative noise with fixed variances $\tilde{\sigma}_{e,i}^2$ only. If the noise sources are much slower than the internal time scale of the system, i.e. if $1/(\beta\tau_e)$ and $1/(\beta\tau_i)$ are practically zero, we can neglect the time derivative in eq. (19). This means that the voltage adapts instantaneously to the multiplicative ("static") noise sources which is strictly justified only for $\beta\tau_e, \beta\tau_i \to \infty$. If τ_e, τ_i attain large but finite values ($\beta\tau_i, \beta\tau_i \gg 1$), the formula derived below will be an approximation that works the better the larger these values are. Because of the slowness of the noise sources compared to the internal time scale, we call the resulting expression the "static-noise" theory for simplicity. This *does not* imply that the total system (membrane voltage plus noise sources) is not in the stationary state: we assume that any initial condition of the variables has decayed on a time scale t much larger[4] than $\tau_{e,i}$. For a simulation of the density this has the practical implication that we should choose a simulation time much larger than any of the involved correlation times.

Setting the time derivative in eq. (19) to zero, we can determine at which position the voltage variable will be for a given quasi-static pair of (y_e, y_i) values, yielding

$$v = \frac{y_e V_E + y_i V_i}{\beta + y_e + y_i} \tag{58}$$

This sharp position will correspond to a δ peak of the probability density

$$\delta\left(v - \frac{y_e V_E + y_i V_i}{\beta + y_e + y_i}\right) = \frac{|y_i(V_i - V_e) - \beta V_e|}{(v - V_e)^2}\delta\left(y_e + \frac{\beta v + y_i(v - V_i)}{(v - V_e)}\right) \tag{59}$$

(here we have used $\delta(ax) = \delta(x)/|a|$). This peak has to be averaged over all possible values of the noise, i.e. integrated over the two Gaussian distributions in order to obtain the marginal density

$$\begin{aligned} \rho_{static}(v) &= \langle \delta(v - v(t)) \rangle \\ &= \int_{-\infty}^{\infty}\int_{-\infty}^{\infty} \frac{dy_e dy_i}{2\pi\tilde{\sigma}_i\tilde{\sigma}_e} \frac{|y_i(V_i - V_e) - \beta V_e|}{(v - V_e)^2}\delta\left(y_e + \frac{\beta v + y_i(v - V_i)}{(v - V_e)}\right) \times \\ &\qquad \exp\left[-\frac{y_e^2}{2\tilde{\sigma}_e^2} - \frac{y_i^2}{2\tilde{\sigma}_i^2}\right] \end{aligned} \tag{60}$$

---

[4] In the strict limit of $\beta\tau_e, \beta\tau_i \to \infty$ this would imply that t goes stronger to infinity than the correlation times $\tau_{e,i}$ do.

Carrying out these integrals yields

$$\rho_{static}(v) = \frac{\tilde{\sigma}_e \tilde{\sigma}_i |V_e - V_i|}{\pi \beta^2 \mu(v)} e^{-\frac{v^2}{2\mu(v)}} \left[e^{-\frac{\nu(v)}{\mu(v)}} + \sqrt{\frac{\pi \nu(v)}{\mu(v)}} \mathrm{erf}\left(\sqrt{\frac{\nu(v)}{\mu(v)}} \right) \right] \tag{61}$$

where erf(z) is the error function (Abramowitz and Stegun, 1970) and the functions $\mu(v)$ and $\nu(v)$ are given by

$$\mu(v) = \frac{\tilde{\sigma}_e^2 (v - V_e)^2 + \tilde{\sigma}_i^2 (v - V_i)^2}{\beta^2} \tag{62}$$

$$\nu(v) = \frac{[\tilde{\sigma}_e^2 V_e (v - V_e) + \tilde{\sigma}_i^2 V_i (v - V_i)]^2}{2 \tilde{\sigma}_e^2 \tilde{\sigma}_i^2 (V_e - V_i)^2} \tag{63}$$

If one of the expressions by R&D eq. (12) or eq. (15) would be the correct solution, it should converge for $\sigma_I = 0$ and $\tau_{e,i} \to \infty$ to the formula for the static case eq. (61). In general, this is not the case since the functional structure of the white-noise solution and that of the static-noise solution are quite different. There is, however, one limit case in which the extended expression yields the same (although trivial) function. If we fix the noise intensities $Q_{e,i}$ and let the correlation times go to infinity, the variances will go to zero and the static-noise density eq. (61) approaches a δ peak at $v = 0$. Although the extended expression eq. (15) has a different functional dependence on system parameters and voltage, the same thing happens in the extended formula for $\tau_{e,i} \to \infty$ because the effective noise intensities $Q'_{e,i} = Q_{e,i}/(1 + \beta \tau_{e,i})$ approach zero in this limit. The white-noise solution at vanishing noise intensities is, however, also a δ peak at $v = 0$. *Hence, in the limit of large correlation time at fixed noise intensities, both the static-noise theory eq. (61) and the extended expression yield both the probability density of a noise-free system and therefore agree.* For fixed variance where a non-trivial large-τ limit of the probability density exists, the static-noise theory and the extended expression by R&D differ as we will also numerically verify later on.

A final remark concerns the asymptotic behavior of the static-noise solution eq. (61). The asymptotic expansions for $v \to \pm\infty$ show that the density goes like $|v|^{-2}$ in either limits. Hence, in this case we cannot obtain a finite variance of the membrane voltage at all (the integral $\int dv\, v^2 \rho_{static}(v)$ will diverge). The mean may be finite since the coefficients of the v^{-2} term are symmetric in v. The estimation in the following section, however, will demonstrate that this is valid only strictly in the limit $\tau_{e,i} \to \infty$ but not at any large but finite value of $\tau_{e,i}$. So the mean may diverge for large but finite $\tau_{e,i}$.

6 Mean value of the voltage for arbitrary values of the correlation times

By inspection of the limit cases we have already seen that the moments do not have to be finite for an apparently sensible choice of parameters. For the white-noise case it was shown that the mean of the voltage is finite only if $\beta > Q_e + Q_i$.

Next, we show by direct analytical solution of the stochastic differential equation eq. (19) involving the colored noise sources eq. (20) that this condition (i.e. eq. (45)) holds in general and thus a divergence of the mean is obtained for $\beta < Q_e + Q_i$.

For only one realization of the process eq. (19), the driving functions $y_e(t)$, $y_i(t)$, and $y_I(t)$ can be regarded as just time-dependent parameters in a linear differential equation. The solution is then straightforward (see also Richardson (2004) for the special case of only multiplicative noise)

$$\begin{aligned} v(t) &= v_0 \exp\left[-\beta t - \int_0^t du (y_e(u) + y_i(u)) \right] + \\ &\int_0^t ds (V_e y_e(s) + V_i y_i(s) + y_I(s)) e^{-\beta(t-s)} \exp\left[- \int_s^t du (y_e(u) + y_i(u)) \right] \end{aligned} \tag{64}$$

The integrated noise processes $w_{e,i}(s,t) = \int_s^t du y_{e,i}(u)$ in the exponents are independent Gaussian processes with variance

$$\langle w_{e,i}^2(s,t)\rangle = 2Q_{e,i}(t - s - \tau_{e,i} + \tau_{e,i}e^{-(t-s)/\tau_{e,i}}). \tag{65}$$

For a Gaussian variable we know that $\langle e^w\rangle = e^{\langle w^2\rangle/2}$ (Gardiner, 1985). Using this relation for the integrated noise processes together with eq. (65) and expressing the average $\langle y_{e,i}(s)\exp[-\int_s^t du y_{e,i}(u)]\rangle$ by a derivative of the exponential with respect to s, we find an integral expression for the mean value

$$\begin{aligned}\langle v(t)\rangle &= v_0 e^{(Q_e+Q_i-\beta)t}\exp\left[-\tau_e f_e(t) - \tau_i f_i(t)\right] \\ &\quad - \int_0^t ds\{V_e f_e(s) + V_i f_i(s)\} e^{(Q_e+Q_i-\beta)s-\tau_e f_e(s)-\tau_i f_i(s)}\end{aligned} \tag{66}$$

where $f_{e,i}(s) = Q_{e,i}(1-\exp[-s/\tau_{e,i}])$. The stationary mean value corresponding to the stationary density is obtained from this expression in the asymptotic limit $t \to \infty$. We want to draw the reader's attention to the fact that this mean value is finite exactly for the same condition as for the white noise case, i.e. for

$$|\langle v\rangle| < \infty \ \text{ iff } \ \beta > Q_e + Q_i \tag{67}$$

Firstly, this is so because otherwise the exponent $(Q_e+Q_i-\beta)t$ in the first line is positive and the exponential diverges for $t \to \infty$. Furthermore, if $\beta < Q_e + Q_i$ the exponential in the integrand diverges at large s.

In terms of the original parameters of R&D the condition for a finite stationary mean value of the voltage reads

$$|\langle v\rangle| < \infty \ \text{ iff } \ g_L a + g_{e0} + g_{i0} > \frac{\sigma_e^2\tau_e + \sigma_i^2\tau_i}{aC_m} \tag{68}$$

Note that this depends also on a and C_m, and not only on the synaptic parameters. R&D use as standard parameter values (Rudolph and Destexhe, 2003, p. 2589) $g_{e0} = 0.0121$ μS, $g_{i0} = 0.0573$ μS, $\sigma_e = 0.012$ μS, $\sigma_i = 0.0264$ μS, $\tau_e = 2.728$ ms, $\tau_i = 10.49$ ms, $a = 34636\mu\text{m}^2$, and $C_m = 1\mu\text{F/cm}^2$. They state that the parameters have been varied in numerical simulations from 0% to 260% relative to these standard values covering more than "the physiological range observed in vivo" (Rudolph and Destexhe, 2003). Inserting the standard values into the relation eq. (68) yields

$$0.0851\mu\text{S} > 0.0221\mu\text{S}. \tag{69}$$

So in this case the mean will be finite. However, using twice of the standard value for the inhibitory noise standard deviation, i.e. $\sigma_i = 0.0528$ μS (corresponding to 200% of the standard value) and all other parameters as before, leads already to a diverging mean because we obtain 0.0852μS on the right hand side of eq. (68) while the left hand side is unchanged. This means, even in the parameter regime that R&D studied, the model predicts an infinite mean value of the voltage. A stronger violation of eq. (68) will be observed by either increasing the standard deviations $\sigma_{e,i}$ and/or correlation times $\tau_{e,i}$ or by decreasing the mean conductances $g_{e,i}$. We also note that for higher moments, and especially for the variance, the condition for finiteness will be even more restrictive as can be concluded from the limit cases investigated before.

The stationary mean value at arbitrary correlation times can be inferred from eq. (66) by taking the limit $t \to \infty$. Assuming the relation eq. (67) holds true, we can neglect the first term involving the initial condition v_0 and obtain

$$\langle v\rangle = -\int_0^\infty ds\{V_e f_e(s) + V_i f_i(s)\}\exp[(Q_e+Q_i-\beta)s - \tau_e f_e(s) - \tau_i f_i(s)] \tag{70}$$

We can also use eq. (70) to recover the white-noise result for the mean as for instance found in Richardson (2004) by taking $\tau_{e,i} \to 0$. In this case we can integrate eq. (70) and obtain

$$\begin{aligned}\langle v\rangle_{wn} &= -\{V_e Q_e + V_i Q_i\}\int_0^\infty ds \exp[(Q_e+Q_i-\beta)s] \\ &= -\frac{V_e Q_e + V_i Q_i}{\beta - Q_e - Q_i}\end{aligned} \tag{71}$$

Because of the similarity of the R&D solution to the white-noise solution (cf. eq. (38)), we can also infer that the mean value of the former density is

$$\langle v \rangle_{RD} = -\frac{V_e Q_e + V_i Q_i}{2\beta - Q_e - Q_i}. \tag{72}$$

Note the different prefactor of β in the denominator that is due to the factor 1/2 in noise intensities of the solution eq. (12) by R&D.

Finally, we can also determine easily the mean value for the extended solution by R&D (Rudolph and Destexhe, 2005) since also this solution is equivalent to the white-noise solution with rescaled noise intensities. Using the noise intensities $Q'_{e,i}$ from eq. (41) we obtain

$$\begin{aligned} \langle v \rangle_{RD,ext} &= -\frac{V_e Q'_e(\tau_e) + V_i Q'_i(\tau_i)}{\beta - Q'_e(\tau_e) - Q'_i(\tau_i)} \\ &= -\frac{V_e Q_e(1+\beta\tau_i) + V_i Q_i(1+\beta\tau_e)}{\beta(1+\beta\tau_i)(1+\beta\tau_e) - Q_e(1+\beta\tau_i) - Q_i(1+\beta\tau_e)} \end{aligned} \tag{73}$$

We will verify numerically that this expression is not equal to the exact solution eq. (70). One can, however, show that for small to medium values of the correlation times $\tau_{e,i}$ and weak noise intensities these differences are not drastic. If we expand both eq. (66) and eq. (73) for small noise intensities Q_e, Q_i (assuming for the former that the products $Q_e\tau_e, Q_i\tau_i$ are small, too), the resulting expressions agree to first order and also agree with a recently derived weak noise result for filtered Poissonian shot noise given by Richardson and Gerstner (2005, cf. eq.(D.3))

$$\langle v \rangle_{RD,ext} \quad \approx \quad \langle v \rangle \approx -\frac{V_e Q_e(1+\beta\tau_i) + V_i Q_i(1+\beta\tau_e)}{\beta(1+\beta\tau_i)(1+\beta\tau_e)} + \mathcal{O}(Q_e^2, Q_i^2) \tag{74}$$

The higher order terms differ and that is why a discrepancy between both expressions can be seen at non-weak noise. The results for the mean value achieved in this section are useful in two respects. Firstly, we can check whether trajectories indeed diverge for parameters where the relation eq. (67) is violated. Secondly, the exact solution for the stationary mean value and the simple expressions resulting for the different solutions proposed by R&D can be compared in order to reveal their range of validity. This is done in the next section.

7 Comparison to simulations

Here we compare the different formulas for the probability density of the membrane voltage and its mean value to numerical simulations for different values of the correlation times, restricting ourselves to the case of multiplicative noise only. We will first discuss the original expression eq. (12) proposed by R&D and the analytical solutions for the limit cases of white and static multiplicative noise (eq. (34) and eq. (61), respectively); later we examine the validity of the new extended expression. Finally, we will also check the stationary and time-dependent mean value of the membrane voltage and discuss how well these simple statistical characteristics are reproduced by the different theories including our exact result eq. (66).

To check the validity of the different expressions we will use first a dimensionless parameter set where $\beta = 1$ but also the original parameter set used by R&D (2003). In both cases we consider variations of the correlation times between three orders of magnitude (i.e. standard values are varied between 10% and 1000%). Note that the latter choice goes beyond the range originally considered by R&D (2003) where parameter variations were limited to the range 0%-260%.

7.1 Probability density of the membrane voltage - original expression by R&D

In a first set of simulations we ignore the physical dimensions of all the parameters and pick rather arbitrary but simple values ($\beta = 1, Q_i = 0.75, Q_e = 0.075$). Keeping the ratio of the correlation times ($\tau_I = 5\tau_e$) and the values of the noise intensities Q_e, Q_i fixed, we vary the correlation times. In Fig. 1 simulation results are shown for $\tau_e = 10^{-2}, 10^{-1}, 1$, and 10. We recall that with a fixed noise intensity according to the result by R&D given in eq. (12), the probability

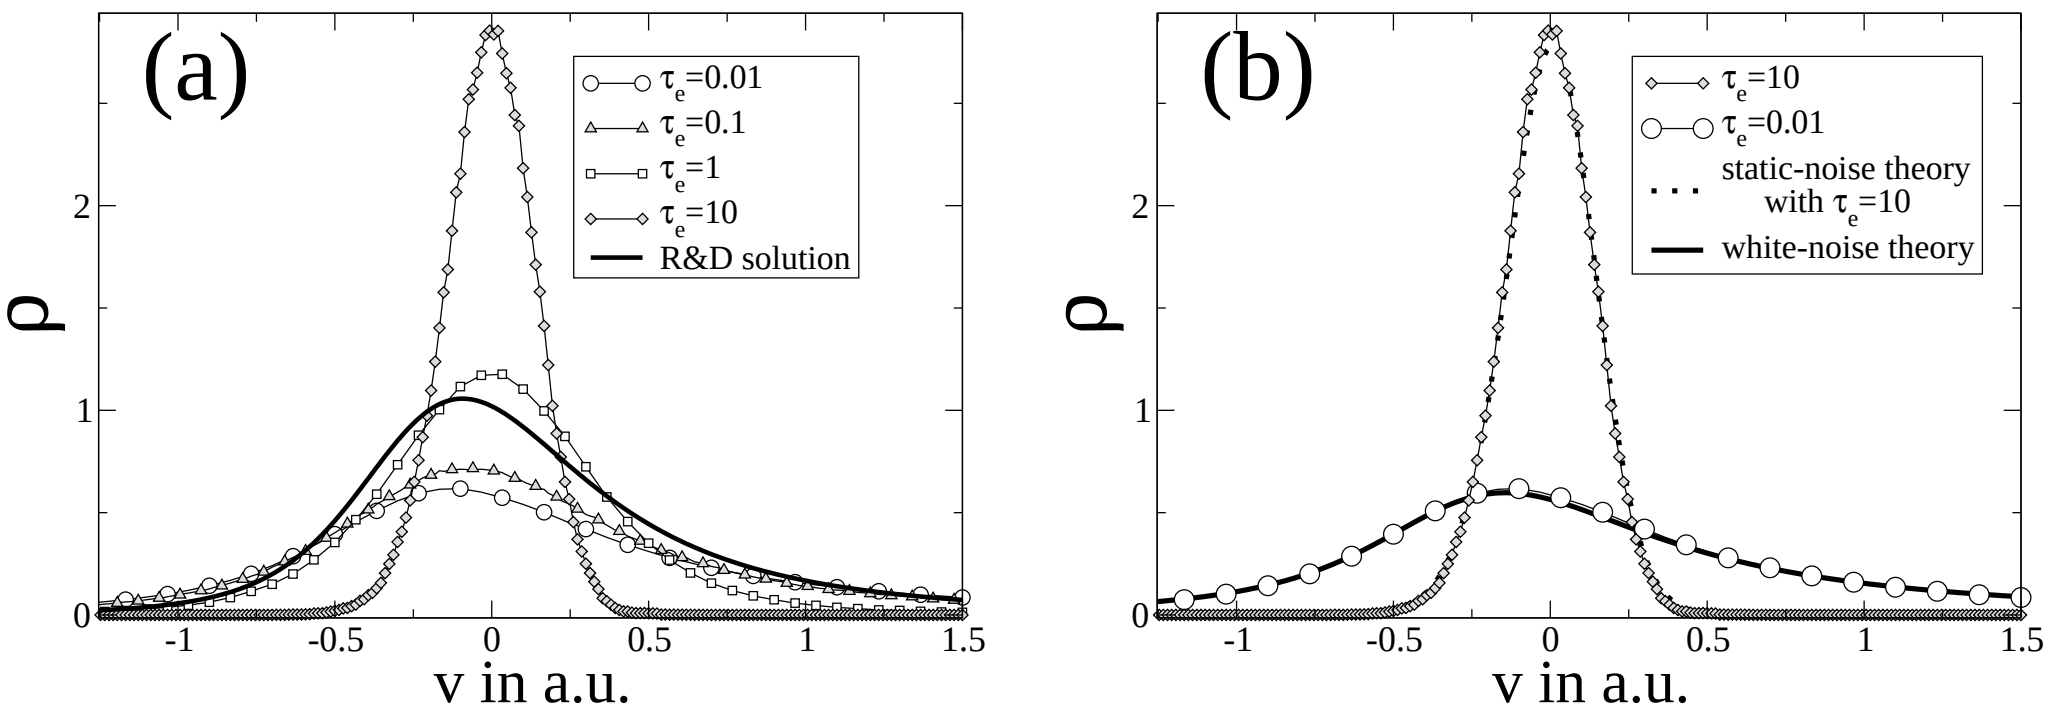

Figure 1: Theoretical expressions for the probability density of the shifted membrane voltage $v = V - \Delta$ compared to results of numerical simulations in case of pure multiplicative noises. Panel a: The density according to eq. (12) (theory by R&D) is compared to simulations at different correlation times (τ_e as indicated, $\tau_i = 5\tau_e$). Since the noise intensities are fixed ($Q_e = 0.075, Q_i = 0.75$), the simulated densities at different correlation times should fall all onto the solid line according to eq. (12) which is not the case. Panel b: The simulations at small ($\tau_e = 0.01$) and large ($\tau_e = 10$) correlation times are compared to our expressions found in the limit case of white and static noise, i.e. eq. (34) and eq. (61), respectively. Note that, in the constant-intensity scaling, eq. (61) depends implicitly on $\tau_{e,i}$ since the variances change as $\sigma_{e,i} = Q_{e,i}/\tau_{e,i}$. In both panels $\beta = 1$ and $Q_I = 0$. For the simulations here and in the following figures, we followed a single realization $v(t)$ using a simple Euler procedure. We used a time step of $\Delta t = 0.001$ and a simulation time of 10^8 time steps. The probability density at a certain voltage is then proportional to the time spent by the realization in a small region around this voltage. Decreasing Δt or increasing the simulation time did not change the above results.

should not depend on τ_e at all.

It is obvious, however, in Fig. 1a that the simulation data depend strongly on the correlation times in contrast to what is predicted by eq. (12). The difference between the original theory by R&D and the simulations is smallest for an intermediate correlation time ($\tau_e = 1$). In contrast to the general discrepancy between simulations and eq. (12), the white-noise formula eq. (34) and the formula from the static-noise theory (cf. solid and dotted lines in Fig. 1b) agree well with the simulations at $\tau_e = 0.01$ (circles) and $\tau_e = 10$ (diamonds), respectively. The small differences between simulations and theory decrease as we go to smaller or larger correlation times, respectively, as expected.

R&D also present results of numerical simulations (Rudolph and Destexhe, 2003). These simulations seem to agree fairly well with their formula. In order to give a flavor of the reliability of these data we have repeated the simulations for one parameter set in (Rudolph and Destexhe, 2003, Fig.2b). These data are shown in Fig. 2b and compared to the original solution eq. (12) by R&D.

For this specific parameter set the agreement is indeed relatively good, although there are differences between the formula and the simulation results in the location of the maximum as well as at the flanks of the density. These differences do not vanish by extending the simulation time or decreasing the time step; hence, the curve according to eq. (12) does not seem to be an exact solution but at best a good approximation.

The disagreement becomes significant if the correlation times are changed by one order of magnitude (Fig. 2a and c) (in this case we keep the variances of the noises constant, as R&D have done rather than the noise intensities as in Fig. 1). The asymptotic formulas for either vanishing (Fig. 2a) or infinite (Fig. 2c) correlation times derived here in this paper do a much better job in these limits. Note that the large correlation time used in Fig. 2c are outside the range considered by R&D (2003). Regardless of the fact that the correlation times we have used in Fig. 2a and c are possibly outside the physiological range, an analytical solution should also cover these cases. Regarding the question of whether the correlation time is short (close to the white-noise limit), long (close to the static limit), or intermediate (as it seems to be the case in the original parameter set of Fig.2b in (Rudolph and Destexhe, 2003)), it is not the absolute value of $\tau_{e,i,I}$ that matters but the product $\beta\tau_{e,i,I}$. Varying one or more of the parameters g_L, g_{e0}, g_{i0}, a, or C_m can push the dynamics in one of the limit cases without the necessity of changing $\tau_{e,i,I}$.

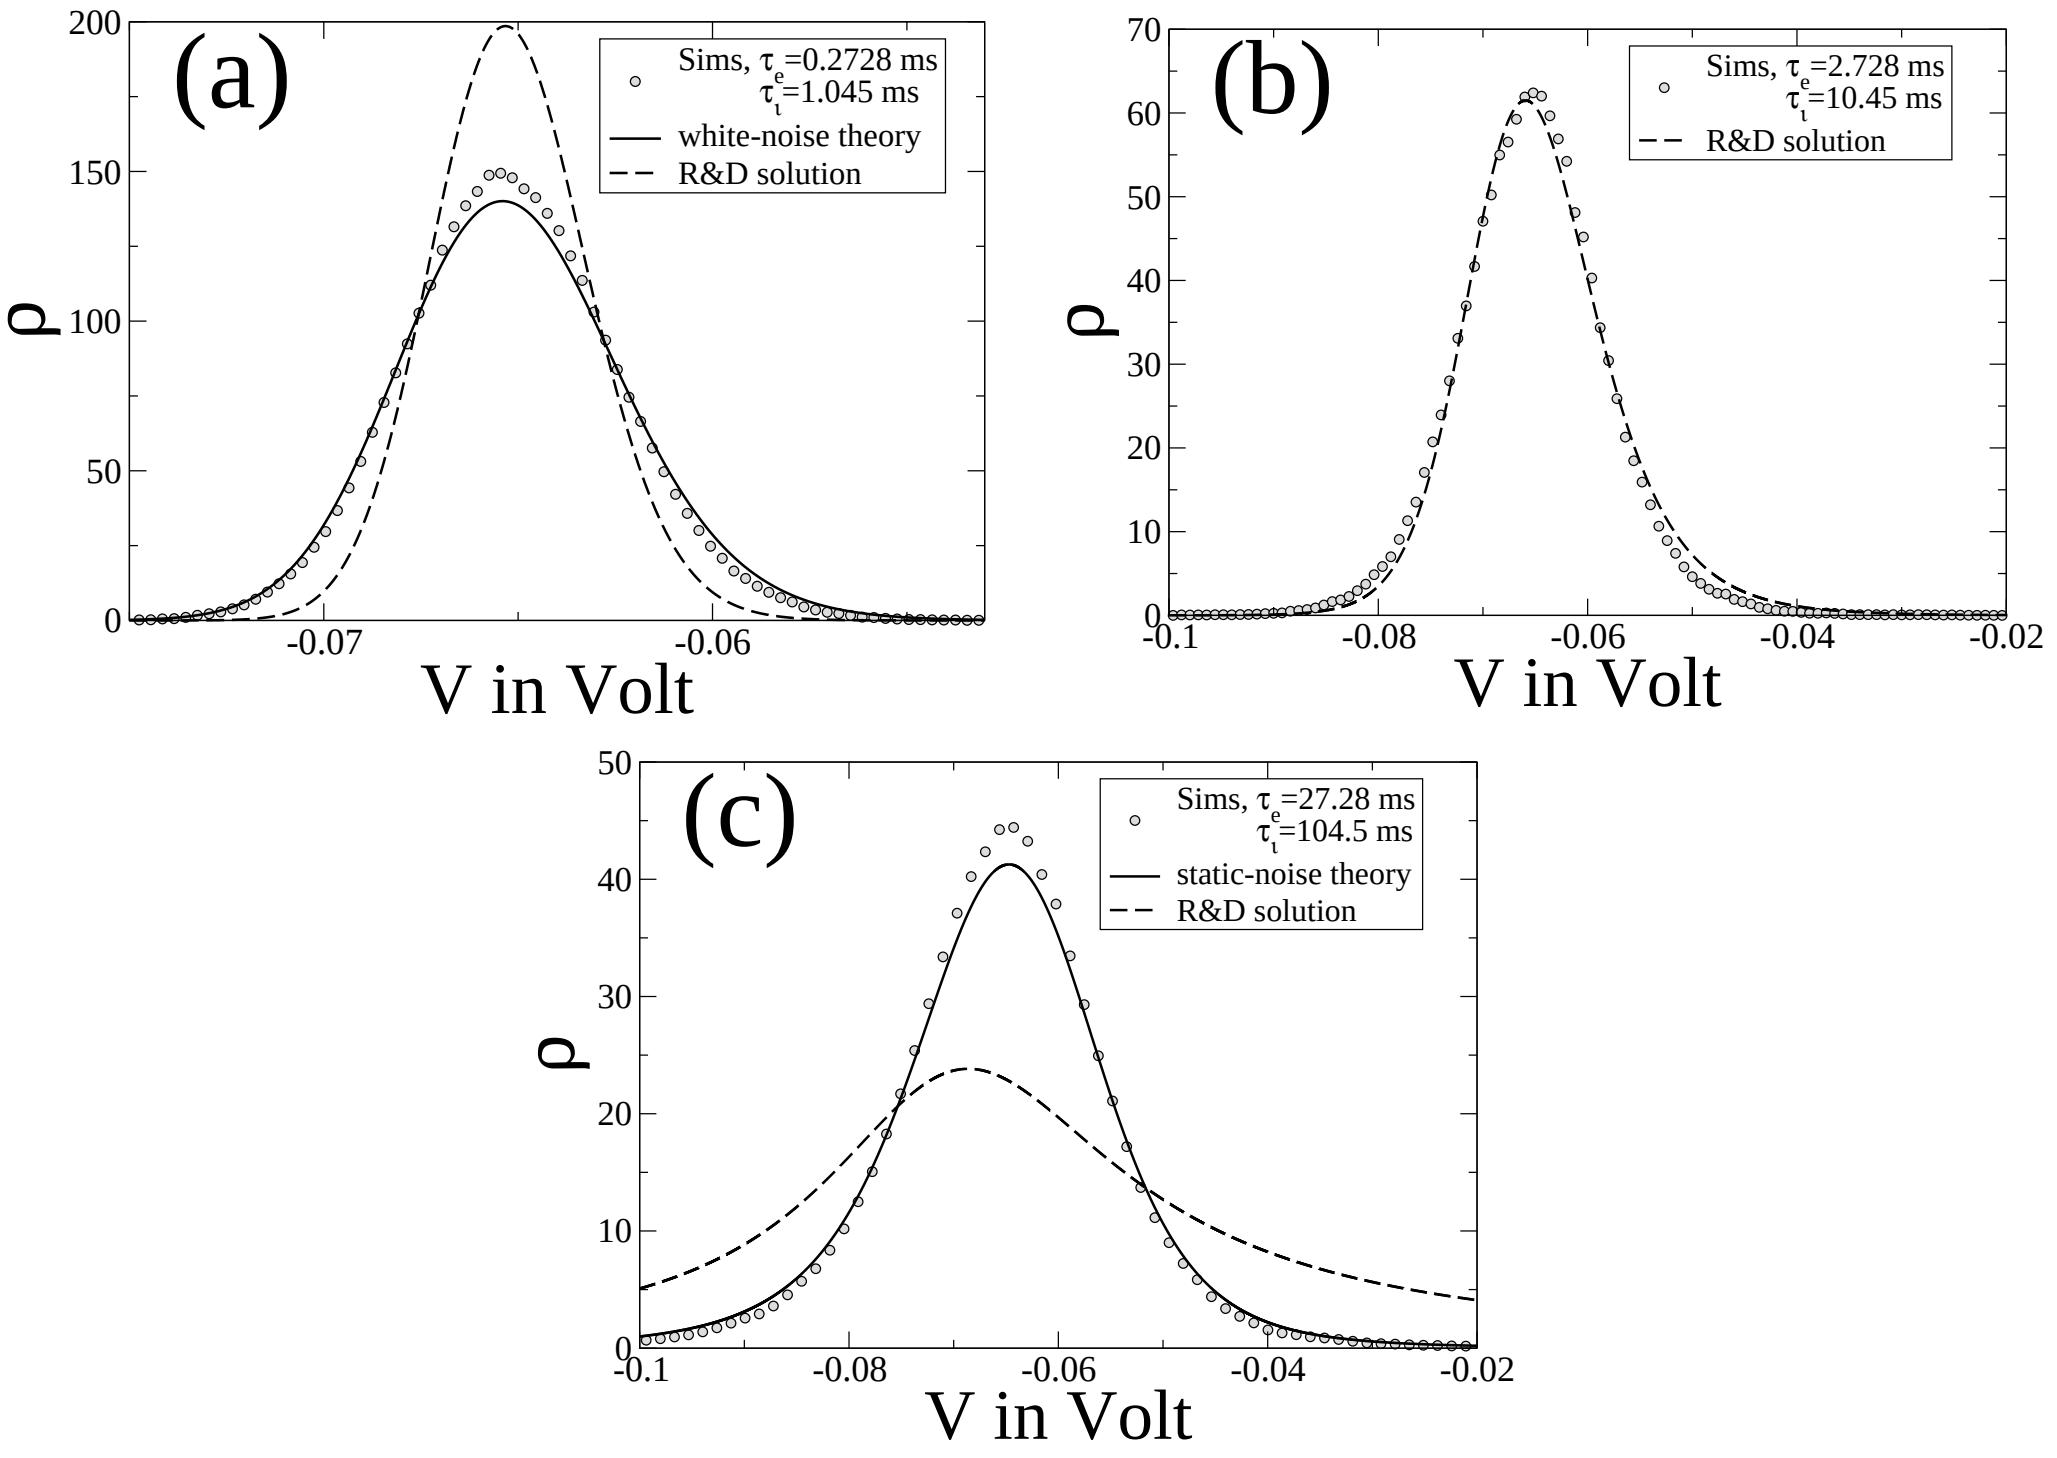

Figure 2: Probability density of membrane voltage for different orders of magnitude of the correlation times τ_e, τ_i. Panel (b) corresponds to the parameter set used by R&D in Fig. 2b of their paper. Starting from this case, we show simulation results with both time constants reduced (panel a) or enlarged (panel c) by one order of magnitude. We compare the simulations in all cases to the curve according to the expression given by R&D (here eq. (12)) (dashed lines) and in the limit cases of short and large correlation times to the white noise (eq. (34)) and the static noise (eq. (61)) theories (both solid lines), respectively. Note that the expressions for the limit cases fit the simulation data not perfectly but much better than the original solution eq. (12) by R&D. Parameters: $g_L = 0.0452\text{mS/cm}^2$, $a = 34636\mu\text{m}^2$, $C_m = 1\mu\text{F/cm}^2$,$E_L = -80\text{mV}$,$E_e = 0\text{mV}$,$E_i = -75\text{mV}$,$\sigma_e = 0.012\mu\text{S}$, $\sigma_i = 0.0264\mu\text{S}$, $g_{e0} = 0.0121\mu\text{S}$, $g_{i0} = 0.0573\mu\text{S}$; additive-noise parameters (σ_I, I_0) are all zero, correlation times of the noises as indicated. Here we used a time step of $\Delta t = 0.1$ ms and a simulation time of 100s as in (Rudolph and Destexhe, 2003).

7.2 Probability density of the membrane voltage - extended expression by R&D

So far we have not considered the extended expression (R&D, 2005) with the effective correlation times. Plotting the simulation data shown in Fig. 1a and Fig. 2 against this new formula, gives indeed a very good although not perfect agreement (cf. Fig. 3a and b). Note, for instance, in Fig. 3a that the height of the peak for $\tau_e = 1$ and the location of the maximum for $\tau_e = 0.1$ is slightly underestimated by the new theory. Since most of the data look similar to Gaussians, we may also check whether they are described by the ETC theory (cf. eq. (25)). This is shown in Fig. 3c and d and reveals that for the parameter sets studied so far, the noise intensities are reasonably small such that the ETC formula gives an approximation almost as good as the extended expression by R&D. One exception to this is shown in Fig. 3c: at small correlation times where the noise is effectively white ($\tau_e = 0.1$), the ETC formula fails since the noise variances become large. For $\tau_e = 0.01$ the disagreement is even worse (not shown). In this range, the extended expression captures the density better, in particular its non-gaussian features (e.g. the asymmetry in the density).

Since the agreement of the extended expression to numerical simulations was so far very good, one could argue that it represents the exact solution to the problem and the small differences are merely due to numerical inaccuracy.

We will check whether the extended expression is the exact solution in two ways. Firstly, we know how the density behaves if both multiplicative noises are very slow ($\beta\tau_e, \beta\tau_i \gg 1$), namely, according to eq. (61). We possess thus an additional control of whether the extended solution eq. (15) is exact by comparing not only to numerical simulation results but also to the static-noise theory. Secondly, we have derived an exact integral expression eq. (70) for the stationary mean value; so we can compare the stationary mean value according to the extended expression by R&D

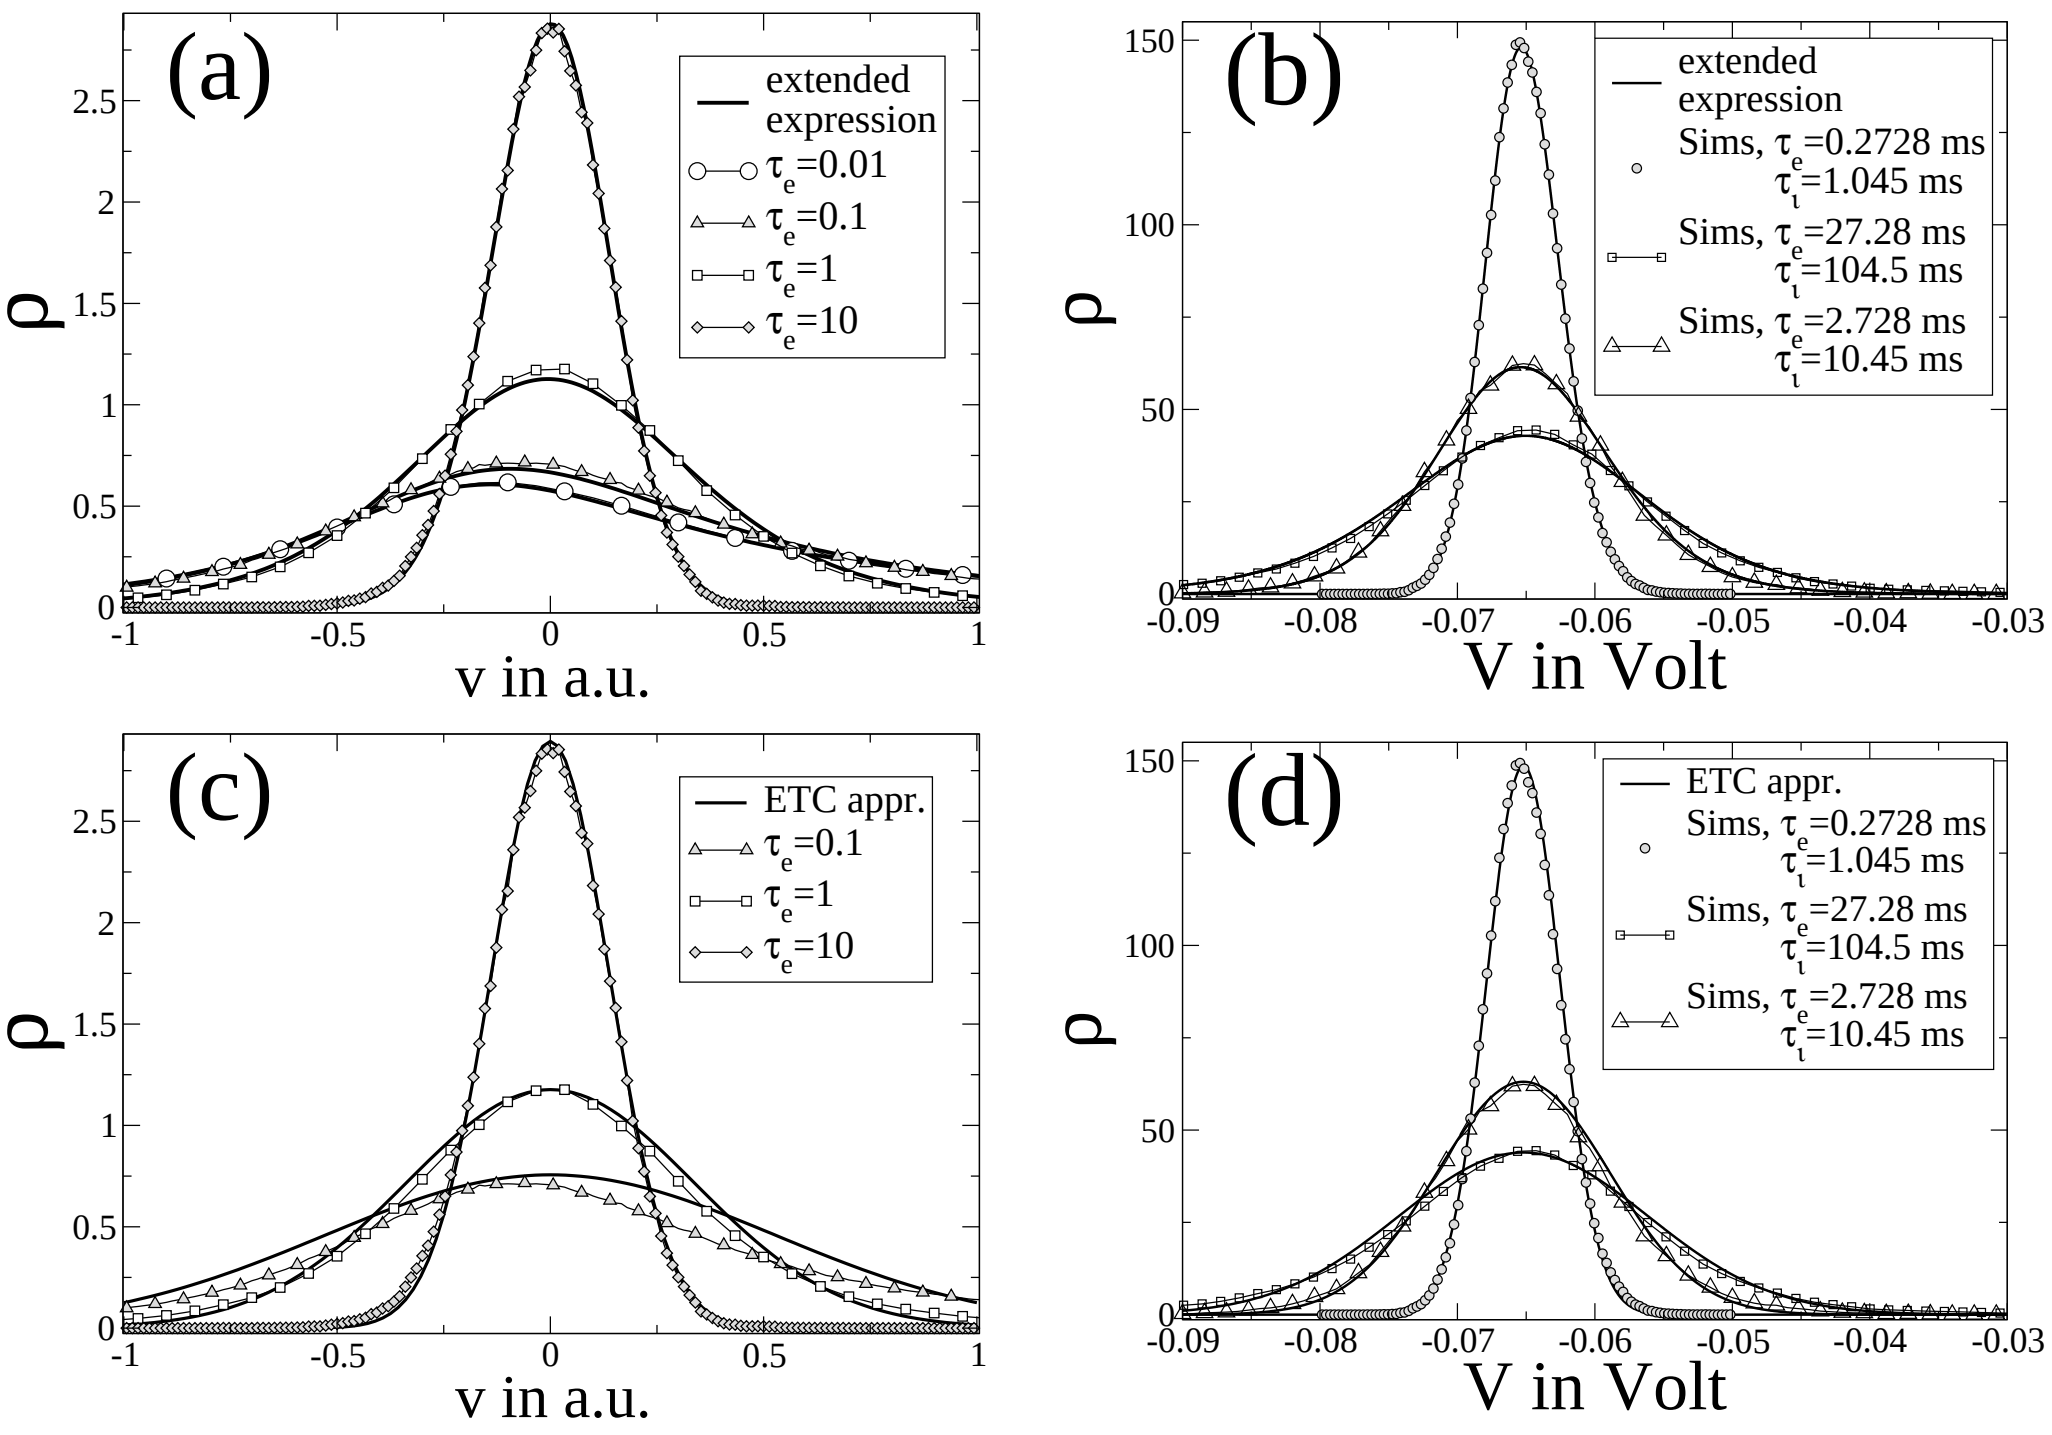

Figure 3: Probability density of membrane voltage for different parameter sets, the extended expression eq. (15) (a and b) and the effective-time constant approximation eq. (25) (c and d) are compared to results of numerical simulations; simulation data and parameters as in Fig. 1a (a and c) and Fig. 2 (b and d).

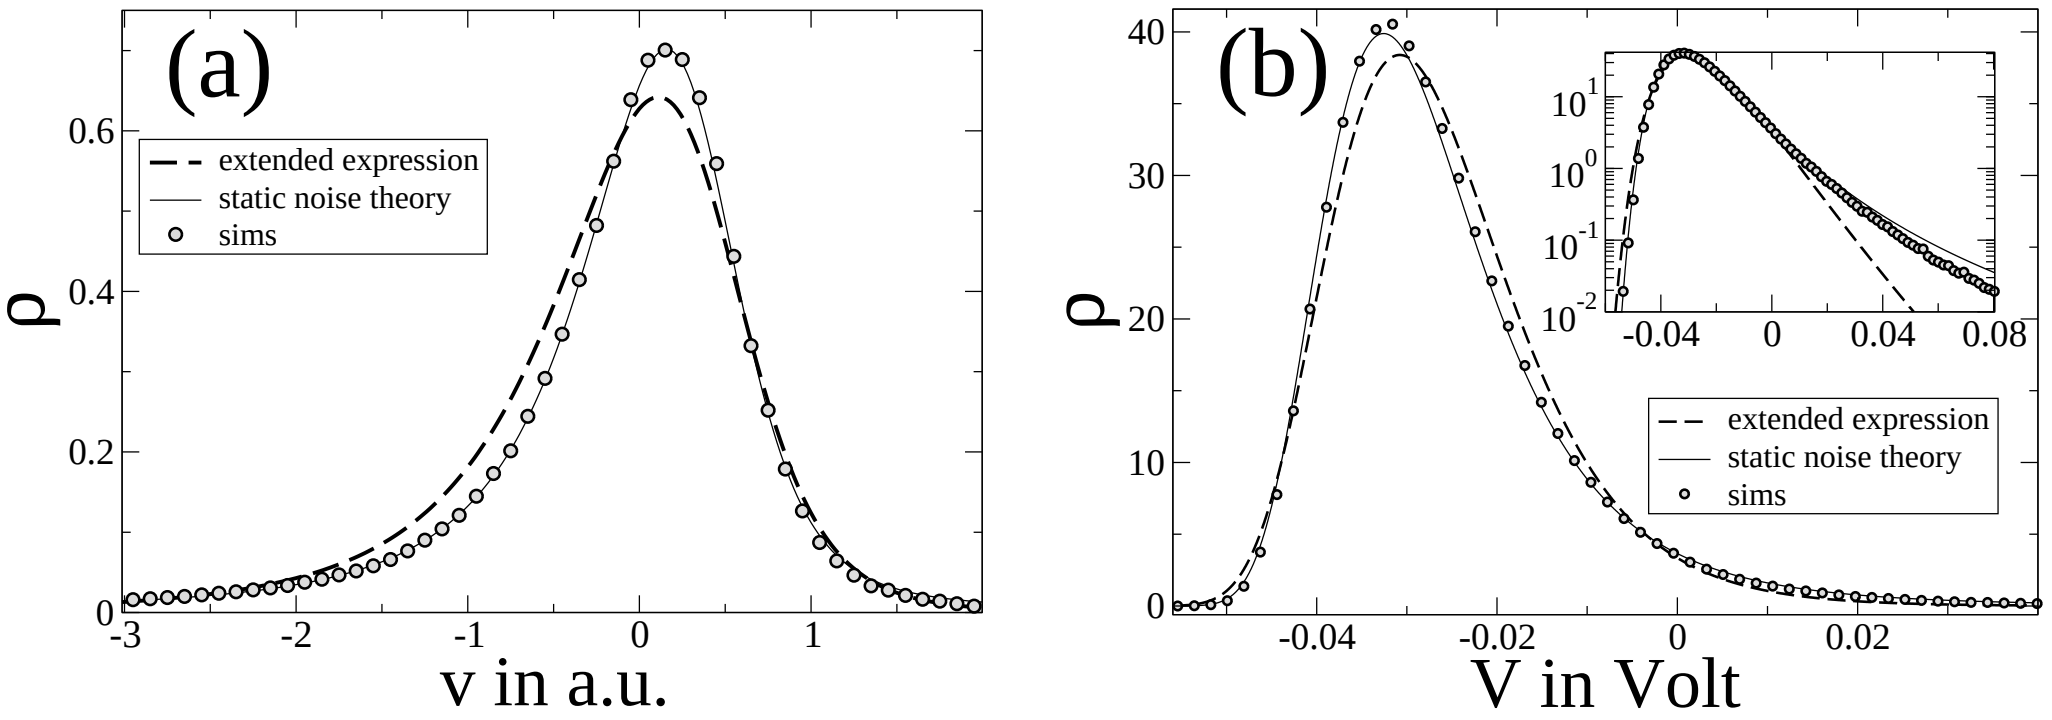

Figure 4: Probability density of membrane voltage for long correlation times; comparison of static-noise theory (eq. (61), solid lines) and extended expression by R&D (eq. (15), dashed lines) to numerical simulations (symbols). Panel a: Probability density of the shifted voltage variable (in arbitrary units) with $Q_e = Q_i = 3, \beta = 1, \tau_e = \tau_i = 20, V_e = 1.5, V_i = -0.50$; for these parameters, the mean value is infinite; in the simulation we therefore had to implement reflecting boundaries, which will (if sufficiently distant) affect the density only in its tails but not in the range shown in the figure. Panel b: density for the original voltage variable with $g_L = 0.0452\text{mS/cm}^2$, $a = 34636\mu\text{m}^2$, $C_m = 1\mu\text{F/cm}^2$,$E_L = -80\text{mV}$,$E_e = 0\text{mV}$,$E_i = -75\text{mV}$,$\sigma_e = 0.012\mu\text{S}$, $\sigma_i = 0.045\mu\text{S}$, $g_{e0} = 0.121\mu\text{S}$, $g_{i0} = 0.0574\mu\text{S}$, $\tau_e = 7.5\text{ms}$, $\tau_i = 30\text{ms}$; for these parameters the mean value is finite. Inset: Same data but on a logarithmic scale.

(given in eq. (73)) to the exact expression and to numerical simulations.

To check the extended expression against the static-noise theory we have to choose parameter values for which $\beta\tau_e$ and $\beta\tau_i$ are much larger than one; at the same time the noise variances should be sufficiently large. We compare both theories eq. (15) and eq. (61) once for the system eq. (19), eq. (20) with simplified parameters at strong noise ($Q_e = Q_i = 1$) and large correlation times ($\beta\tau_{e,i} = 20$) (Fig. 4a) and once for the original system (Fig. 4b). For the latter, increases in $\beta\tau_{e,i}$ can be achieved by either increasing g_L, g_{e0}, g_{i0} or by increasing the synaptic correlation times $\tau_{e,i}$. We do both and increase g_{e0} to the ten-fold of the standard value by R&D (i.e. $g_{e0} = 0.0121\mu\text{S} \rightarrow g_{e0} = 0.121\mu\text{S}$) and also multiply the standard values of the correlation times by roughly three (i.e. $\tau_e = 2.728\text{ms}$, $\tau_i = 10.45\text{ms} \rightarrow$

$\tau_e = 7.5$ms, $\tau_i = 30$ms); additionally, we also choose a larger standard deviation for the inhibitory conductance than in R&D's standard parameter set ($\sigma_i = 0.0264\mu$S $\rightarrow \sigma_i = 0.045\mu$S). For these parameters we have $\beta\tau_e \approx 4.2$ and $\beta\tau_i \approx 16.8$, so we may expect a reasonable agreement between static-noise theory and the true probability density of the voltage obtained by simulation.

Indeed, for both parameter sets, the static-noise theory works reasonably well. For the simulation of the original system (Fig. 4b), we also checked that the agreement is significantly enhanced (agreement within line width) by using larger correlation times (e.g. $\tau_e = 20$ms, $\tau_i = 100$ms) as it can be expected. Compared to the static-noise theory, the extended expression by R&D shows stronger although not large deviations. There are differences in the location and height of the maximum of the densities for both parameter sets; prominent is also the difference between the tails of the densities (Fig. 4b inset). Hence, there are parameters that are not completely outside the physiological range, for which the extended expression does not yield an exact but only an approximate description and for which the static-noise theory works better than the extended expression by R&D. This is in particular the case for strong and long-correlated noise.

7.3 Mean value of the membrane voltage

The second way to check the expressions by R&D was to compare their mean values to the exact expression for the stationary mean eq. (70). We do this for the transformed system eq. (19), eq. (20) with dimensionless parameters. In Fig. 5, the stationary mean value is shown as a function of the correlation time τ_e of the excitatory conductance. In the two different panels we keep the noise intensities Q_e and Q_i fixed; the correlation time of inhibition is small (panel a) or medium (panel b) compared to the intrinsic time scale ($1/\beta = 1$). We choose noise intensities $Q_i = 0.3$ and $Q_e = 0.2$ so that the mean value is finite because eq. (67) is satisfied. In Fig. 5a the disagreement between the extended theory by R&D (dash-dotted line) and the exact solution (thick solid line) is apparent for medium values of the correlation time. To verify this additionally, we also compare to numerical simulation results. The latter agree with our exact theory for the mean value within the numerical error of the simulation. We also plot two limits that may help to understand why the new theory by R&D works in this special case at very small and very large values of τ_E. At small values, both noises are effectively white and we have already discussed that in this case the extended expression for the probability density eq. (15) approaches the correct white-noise limit. Hence, also the moment should be correctly reproduced in this limit. On the other hand, going to large correlation time τ_e at fixed noise intensity Q_e means, that the effect of the colored noise $y_e(t)$ on the dynamics vanishes. Hence, in this limit we obtain the mean value of a system that is driven only by one white noise (i.e. $y_i(t)$). Also this limit is correctly described by R&D's new theory since the effective noise intensity $Q_e' = 2Q_e/[1 + \beta\tau_e]$ vanishes for $\tau_e \rightarrow \infty$ if Q_e is fixed. However, for medium values of τ_e, the new theory predicts a larger mean value than the true value. The mean value eq. (72) of the original solution eq. (12) (dotted lines in Fig. 5) leads to a mean value of the voltage that does not depend on the correlation time τ_e at all.

If the second correlation time τ_I is of the order of the effective membrane time constant $1/\beta$ (Fig. 5b), the deviations between the mean value of the extended expression and the exact solution is smaller but extends over all values of τ_e. In this case the new solution does not approach the correct one in neither of the limit cases $\tau_e \rightarrow 0$ or $\tau_e \rightarrow \infty$. The overall deviations between the mean according to the extended expression is small. Also for both panels, the differences in the mean are small compared to the standard deviations of the voltage. Thus, the expression eq. (73) corresponding to the extended solution can be regarded as a good approximation for the mean value.

Finally, we illustrate the convergence or divergence of the mean if the condition eq. (67) is obeyed or violated, respectively. First, we choose the original system and the standard set of parameters by Rudolph and Destexhe (2003) and simulate a large number of trajectories in parallel. All of these are started at the same value ($V = 0$) and each with independent noise sources, the initial values of which are drawn from the stationary Gaussian densities. In an experiment, this corresponds exactly to fixing the voltage of the neuron via voltage clamp and then to let the voltage

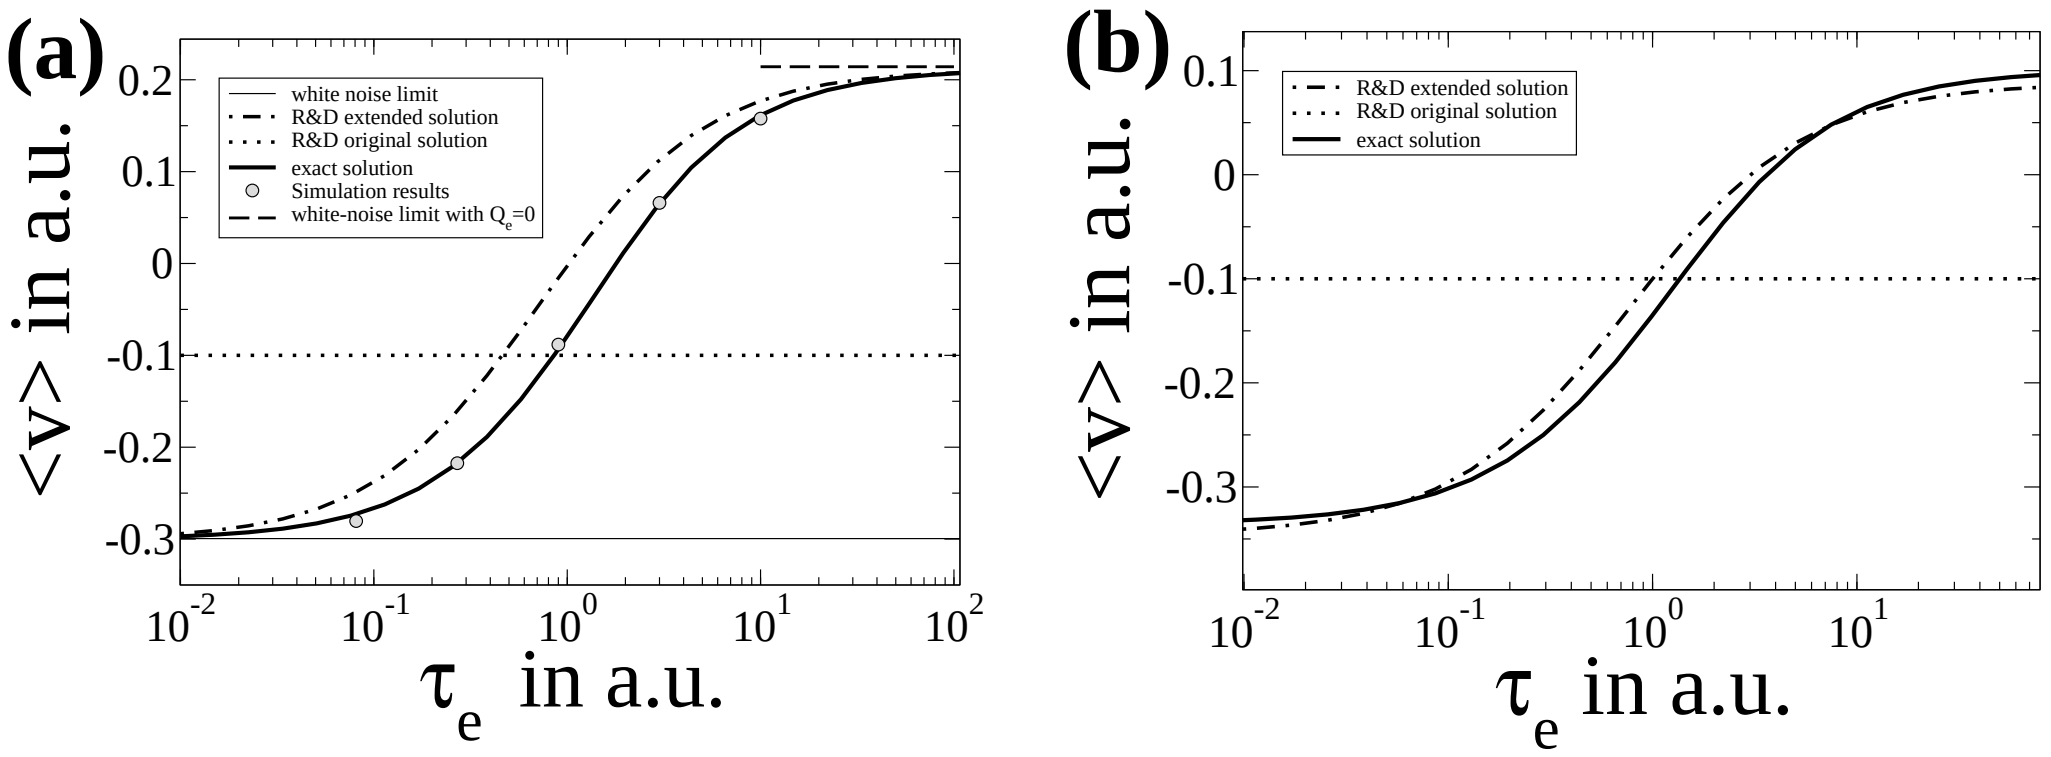

Figure 5: Stationary mean value of the shifted voltage (in arbitrary units) vs correlation time (in arbitrary units) of the excitatory conductance. Noise intensities $Q_e = 0.2, Q_i = 0.3, Q_I = 0$ and $\beta = 1$ are fixed in all panels. The correlation time of the inhibitory conductance is $\tau_i = 10^{-2}$ (a) and $\tau_i = 1$ (b). Shown are the exact analytical result eq. (70) (solid line), the mean value according to the original solution eq. (72) (dotted line), and the mean value according to the extended solution eq. (73) (dash-dotted line). In panel a, we also compare to the mean value of the white-noise solution for $Q_e = 0.2, Q_i = 0.3$ (thin solid line) and for $Q_e = 0, Q_i = 0.3$ (dashed line) as well as to numerical simulation results (symbols).

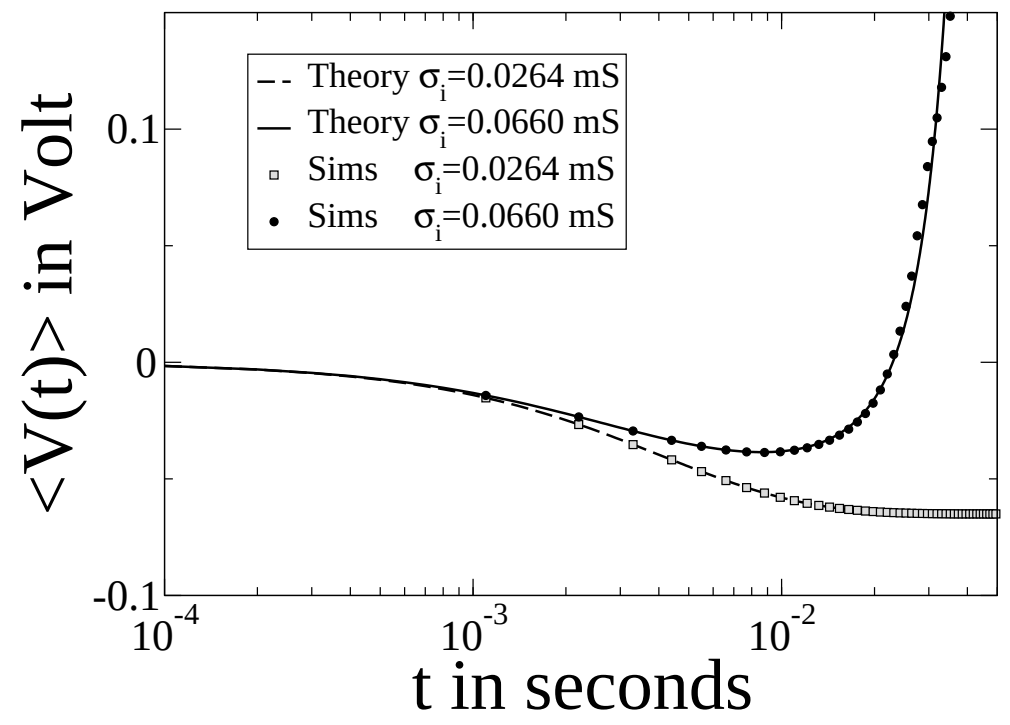

Figure 6: Time dependent mean value of the original voltage variable (in Volts) as a function of time (in seconds) for the initial value $V(t = 0) = 0$V and different values of the inhibitory conductance standard deviation σ_i; numerical simulations of eq. (19) and eq. (20) (circles) and theory according to eq. (66) (solid lines). For all curves $g_{e0} = 0.0121$ μS, $g_{i0} = 0.0573$ μS, $\sigma_e = 0.012$ μS, $\tau_e = 2.728$ ms, $\tau_i = 10.49$ ms, $a = 34636 \mu\text{m}^2$, and $C_m = 1 \mu\text{F/cm}^2$. For the dashed line (theory) and the grey squares (simulations) we choose $\sigma_i = 0.0264$ μS, hence in this case, parameters correspond to the standard parameter set by Rudolph and Destexhe (2003). For the solid line (theory) and the black circles we used $\sigma_i = 0.066$ μS corresponding to the 250% of the standard value by R&D. While at the standard parameter set, the mean value saturates at a finite level, in the second case the mean diverges and goes beyond 100mV within 31ms. Simulations were carried out for 10^6 voltage trajectories using an adaptive time step (always smaller than 0.01 ms) that properly took into account those trajectories that diverge strongest. The large number of trajectories was required in order to get a reliable estimate of the time-dependent mean value in the case of strong noise ($\sigma_i = 0.066$ μS) where voltage fluctuations are quite large.

freely evolve under the influence of synaptic input (that has not been affected by the voltage clamp). We compare the time-dependent average of all trajectories to our theory eq. (66) (in terms of the original variable and parameters). For R&D's standard parameters the mean value reaches after a relaxation of roughly 20ms a finite value (V≈ −65mV). The time course of the mean value is well reproduced by our theory as it should be. Increasing one of the noise standard deviations to a 2.5-fold of its standard value ($\sigma_i = 0.0264$ μS $\rightarrow$ 0.066 μS), which is still in the range inspected by R&D, results in a diverging mean[5]. Again the theory (solid line) is confirmed by the simulation results (black circles). Starting from zero voltage, the voltage goes beyond 100mV within 31ms. In contrast to this, the mean value of the extended formula is finite (the condition eq. (47) is obeyed) and the mean value formula for this density eq. (73) yields a stationary mean voltage of −66 mV. Thus, in the general colored-noise case, the extended formula cannot be used to decide whether the moments of the membrane voltage will be finite or not.

---

[5] These parameter values were not considered by R&D to be in the physiological range. We cannot, however, exclude that other parameter variations (e.g. decreasing the leak conductance or increasing the synaptic correlation times) will not lead to a diverging mean for parameters in the physiological range.

We note that the divergence of the mean is due to a small number of strongly deviating voltage trajectories in the ensemble over which we average. This implies that the divergence will not be seen in a typical trajectory and that a large ensemble of realizations and a careful simulation of the rare strong deviations (adaptive time step) is required to confirm the diverging mean predicted by the theory. Thus, although the linear model with multiplicative Gaussian noise is thought to be a simple system compared to nonlinear spike generators with Poissonian input noise, its careful numerical simulation may be much harder than that of the latter type of model.

8 Conclusions

We have demonstrated that the formula for the probability density of the membrane voltage driven by multiplicative and/or additive (conductance and/or current noise) proposed by R&D in their original paper is wrong in general. In particular, it fails in all tractable limit cases (white noise driving, colored additive noise, and static multiplicative noise). Their extended expression, however, seems to provide a good approximation to the probability density of the system for a large range of parameters.

In the appendix we show where errors have been made in the derivation of the Fokker-Planck equation on which both the original and extended solutions are based. Although there are serious flaws in the derivation, we have seen that the new formula (obtained by an ad-hoc introduction of effective correlation times in the original solution) gives a very good reasonable approximation to the probability density for weak noise. What could be the reason for this good agreement?

The best though still phenomenological reasoning for the solution eq. (15) goes as follows. Firstly, an approximation to the probability density should work in the solvable white-noise limit

$$\lim_{\tau_e,\tau_i\to 0} \rho_{appr}(v, Q_e, Q_i, \tau_e, \tau_i) = \rho_{wn}(v, Q_e, Q_i) \tag{75}$$

Secondly, we know that at weak multiplicative noise of arbitrary correlation time the effective-time constant approximation will be approached

$$\rho_{appr}(v, Q_e, Q_i, \tau_e, \tau_i) = \rho_{ETC}(v, Q_e, Q_i, \tau_e, \tau_i), \quad (Q_e, Q_i \text{ small}) \tag{76}$$

The latter density given in eq. (25) can be expressed by the white-noise density with rescaled noise intensities (note that the variance in the ETC approximation given in eq. (26) has this property); furthermore, it is close to the density for white multiplicative noise if the noise is weak

$$\begin{aligned}\rho_{ETC}(v, Q_e, Q_i, \tau_e, \tau_i) &= \rho_{ETC}(v, Q_e/(1+\beta\tau_e), Q_i/(1+\beta\tau_i), 0, 0),\\ &\overset{(Q_e,Q_i \text{ small})}{\approx} \rho(v, Q_e/(1+\beta\tau_e), Q_i/(1+\beta\tau_i), 0, 0)\\ &= \rho_{wn}(v, Q_e/(1+\beta\tau_e), Q_i/(1+\beta\tau_i))\end{aligned} \tag{77}$$

Hence, using this equation together with eq. (76), one arrives at

$$\rho_{appr}(v, Q_e, Q_i, \tau_e, \tau_i) \approx \rho_{wn}(v, Q_e/(1+\beta\tau_e), Q_i/(1+\beta\tau_i)) \tag{78}$$

This approximation which also obeys eq. (75) is the extended expression by R&D. It is expected to function in the white-noise and the weak-noise limits and can be regarded as an interpolation formula between these limits. We have seen that for stronger noise and large correlation times (i.e. in a parameter regime where neither of the above assumptions of weak or uncorrelated noise hold true) this density and its mean value disagree with numerical simulation results as well as with our static-noise theory. Regarding the parameter sets for which we checked the extended solution for the probability density, it is remarkable that the differences to numerical simulations were not stronger.

Two issues remain. Firstly, we have shown that the linear model with Gaussian conductance fluctuations can show a diverging mean value. Certainly, for higher moments, as for instance, the variance, the restrictions on parameters will be even more severe than that for the mean value (this can be concluded from the tractable limit cases we have considered). As demonstrated in case of the stationary mean value, the parameter regime for such a divergence cannot be determined using the different solutions proposed by R&D.

Of course, a real neuron *can* be driven by a strong synaptic input *without* showing a diverging mean voltage — the divergence of moments found above is just due to the limitations of the model. One such limitation is the diffusion approximation on which the model is based. Applying this approximation, the synaptically filtered spike train inputs have been replaced by Ornstein-Uhlenbeck processes. In the original model with spike train input, it is well known that the voltage cannot go below the lowest reversal potential E_i or above the excitatory reversal potential E_e if no current (additive) noise is present (see e.g. Lánský and Lánská (1987) for the case of unfiltered Poissonian input). In this case, we do not expect a power law behavior of the probability density at large values of the voltage. Another limitation of the model considered by R&D is that no nonlinear spike generating mechanism has been included. In particular, the mechanism responsible for the voltage reset after an action potential would prevent any power law at strong positive voltage. Thus, we see that at strong synaptic input the shot-noise character of the input and nonlinearities in the dynamics cannot be neglected anymore and even determine whether the mean of the voltage is finite or not.

The second issue concerns the consequences of the diffusion approximation for the validity of the achieved results. Even if we assume a weak noise such that all the lower moments like mean and variance will be finite, is there any effect of the shot-noise character of the synaptic input that is not taken into account properly by the diffusion approximation? Richardson and Gerstner (2005) have recently addressed this issue and shown that the shot-noise character will affect the statistics of the voltage and that its contribution is comparable to that resulting from the multiplicativity of the noise. Thus, for a consistent treatment one should either include both features (as done by Richardson and Gerstner (2005) in the limit of weak synaptic noise) or none (corresponding to the effective-time-scale approximation, cf. Richardson and Gerstner (2005)).

Summarizing, we believe that the use of the extended expression by R&D is restricted to parameters obeying

$$\beta \gg Q_e + Q_i. \tag{79}$$

This restriction is consistent with (1) the diffusion approximation on which the model is based; (2) a qualitative justification of the extended expression by R&D as given above; (3) the finiteness of the stationary mean and variance. For parameters which do not obey the condition eq. (79), one should take into account the shot-noise statistics of the synaptic drive. Recent perturbation results were given by Richardson and Gerstner (2005) assuming weak noise; we note that the small parameter in this theory is $(Q_e + Q_i)/\beta$ and therefore exactly equal to the small parameter in eq. (79).

The most promising result in our paper seems to be the exact solution for the time-dependent mean value, a statistical measure that can be easily determined in an experiment and might tell us a lot about the synaptic dynamics and its parameters. The only weakness of this formula is that it is still based on the diffusion approximation, i.e. on the assumption of Gaussian conductance noise. One may, however, overcome this limitation by repeating the calculation for synaptically filtered shot-noise.

9 Acknowledgments

This research was supported by NSERC Canada and a Premiers Research Excellence Award (PREA) from the Government of Ontario. We also acknowledge an anonymous reviewer for bringing the unpublished Note by R&D to our attention.

A Errors made in the derivation of the Fokker-Planck equation

Let us first note that although R&D use a so-called Ito rule, there is no difference between the Ito and Stratonovich interpretations of the colored-noise-driven membrane dynamics. Since the noise processes possess a finite correlation time, the Ito-Stratonovich dilemma occurring in systems driven by white multiplicative noise is not an issue here.

To comprehend the errors in the analytical derivation of the Fokker-Planck equation in R&D, *it suffices to consider the case of only additive OU noise*. For clarity we will use our own notation: the OUP is denoted by $y_I(t)$ and we set $h_I = 1$ (the latter function is used in R&D for generality). R&D give a formula for the differential of an arbitrary function $F(v(t))$ in eq. (B.9)

$$dF(v(t)) = \partial_v F(v(t))dv + \frac{1}{2}\partial_v^2 F(v(t))(dv)^2 \tag{80}$$

R&D use the membrane equation in its differential form, which for vanishing multiplicative noises reads

$$dv = f(v)dt + dw_I \tag{81}$$

where the drift term is $f(v) = -\beta v$ and w_I is the integrated OU process y_I, i.e.

$$w_I = \int_0^t ds\, y_I(s). \tag{82}$$

Inserting eq. (81) into eq. (80), we obtain

$$dF(v(t)) = \partial_v F(v(t))f(v(t))dt + \partial_v F(v(t))d\tilde{w}_I + \frac{1}{2}\partial_v^2 F(v(t))(dw_I)^2 \tag{83}$$

This should correspond to eq. (B.10) in R&D for the case of zero multiplicative noise. However, our formula differs from eq. (B.10) in one important respect: R&D have replaced $(dw_I)^2$ by $2\alpha_I(t)dt$ using their Ito rule[6] eq. (A.13a). Dividing by dt, averaging, and using the fact that for finite τ_I $dw_I(t)/dt = y_I(t)$, we arrive at

$$\frac{d\langle F(v(t))\rangle}{dt} = \langle \partial_v F(v(t))f(v(t))\rangle + \langle \partial_v F(v(t))y_I(t)\rangle + \frac{1}{2}\Big\langle \partial_v^2 F(v(t))\frac{(dw_I)^2}{dt}\Big\rangle. \tag{84}$$

This should correspond to eq. (B.12) in R&D (again for the case of vanishing multiplicative noise) but is not equivalent to the latter equation for two reasons. Firstly, R&D set the second term on the r.h.s. to zero reasoning that the mean value $\langle y_I(t)\rangle$ is zero (they also use an argument about $h_{\{e,i,I\}}$, which is irrelevant in the additive noise case considered here). Evidently, if $y_I(t)$ is a colored noise it will be correlated to its values in the past $y(t')$ with $t' < t$. The voltage $v(t)$ and any nontrivial function $F(v(t))$ is a functional of and therefore correlated to $y_I(t')$ with $t' < t$. Consequently, there is also a correlation between $y_I(t)$ and $F(v(t))$, and thus

$$\langle \partial_v F(v(t))y_I(t)\rangle \neq \langle \partial_v F(v(t))\rangle\langle y_I(t)\rangle = 0 \tag{85}$$

Hence, setting the second term (that actually describes the effect of the noise on the system) to zero is wrong[7]. This also applies for the respective terms due to the multiplicative noise.

Secondly, the last term on the r.h.s. of eq. (84) was treated as a finite term in the limit $t \to \infty$. According to R&D's eq. (A.13a) (for $i = j$), eq. (3.2), and eq. (3.3), $\lim\limits_{t\to\infty}\langle (dw_I)^2\rangle = \lim\limits_{t\to\infty} 2\alpha_I(t)dt = \tilde{\sigma}_I^2\tau_I dt$ and, thus $\langle (dw_I^2)\rangle/dt \to \tilde{\sigma}_I^2\tau_I$ as $t \to \infty$. However, the averaged variance of $dw_I = y_I(t)dt$ is $\langle (dw_I)^2\rangle = \langle y_I(t)^2\rangle(dt)^2 = \tilde{\sigma}_I^2(dt)^2$ and, therefore, the last term in eq. (84) is of first order in dt (since $(dw_I)^2/dt = y_I(t)^2 dt \sim dt$) and vanishes. We note that the limit in eq. (3.3) is not correctly carried out — even if we follow R&D in using their relations (A.13a) together with the correct relation (A.10a), we obtain that for finite τ_I, the mean squared increment $\langle (dw_I)^2\rangle$ is zero in linear order in dt for all times t which is in contradiction to eq. (3.3) in R&D.

We now show that keeping the proper terms in eq. (84) does not lead to a useful equation for the solution of the original problem. After applying what was explained above, eq. (84) reads correctly

$$\frac{d\langle F(v(t))\rangle}{dt} = \langle \partial_v F(v(t))f(v(t))\rangle + \langle \partial_v F(v(t))y_I(t)\rangle. \tag{86}$$

---

[6] Note that R&D use $\alpha_I(t)$ for two different expressions, namely, according to eq. (B.8) for $\tilde{\sigma}_I^2[\tau_I(1-\exp(-t/\tau_I))-t] + w_I^2(t)/(2\tau_I)$ but also according to eq. (3.2) in R&D for the average of this stochastic quantity.

[7] For those readers, still unconvinced of eq. (85) a simple example: Let $F(v(t)) = v^2(t)/2$. Then $\langle \partial_v F(v(t))y_I(t)\rangle = \langle v(t)y_I(t)\rangle$. In the stationary state this average can be calculated as $\int\int dv dy_I\, v y_I P_0(v, y_I)$ using the density eq. (53). This yields $\langle v(t)y_I(t)\rangle = Q_I/[1+\beta\tau_I]$ which is finite for all finite values of the noise intensity Q_I and correlation time τ_I. Note that this line of reasoning is only valid for truly colored noise ($\tau_I > 0$); the white-noise case has to be treated separately.

Because of the correlation between $v(t)$ and $y_I(t)$, we have to use the full two-dimensional probability density to express the averages

$$\begin{aligned}\langle \partial_v F(v(t)) f(v(t))\rangle &= \int dv \int dy_I (\partial_v F(v)) f(v) P(v, y_I, t) \\ &= \int dv (\partial_v F(v)) f(v) \rho(v,t) \\ \langle \partial_v F(v(t)) y_I(t)\rangle &= \int dv \int dy_I (\partial_v F(v)) y_I P(v, y_I, t) \end{aligned} \tag{87}$$

Inserting these relations into eq. (86), performing an integration by part, and setting $F(v) = 1$ leads us to

$$\partial_t \rho(v,t) = -\partial_v (f(v)\rho(v,t)) - \partial_v \left(\int dy_I y_I P(v,y,t) \right) \tag{88}$$

which is not a closed equation for $\rho(v,t)$, nor is it a Fokker-Planck equation. The above equation with $f(v) = -\beta v$ can be also obtained by integrating the two-dimensional Fokker-Planck equation eq. (52) over y_I.
In conclusion, by neglecting a finite term and assuming a vanishing term to be finite, R&D have effectively *replaced* one term by the other, i.e. the colored-noise drift term is replaced by a white-noise diffusion term, the latter with a prefactor that corresponds to only half of the noise intensity. This amounts to a white-noise approximation of the colored conductance noise, although with a noise-intensity that is not correct in the white-noise limit of the problem.

References

M. Abramowitz and I. A. Stegun. *Handbook of Mathematical Functions.* Dover, New York, 1970.

N. Brunel and S. Sergi. Firing frequency of leaky integrate-and-fire neurons with synaptic currents dynamics. *J. Theor. Biol.*, 195:87, 1998.

C. W. Gardiner. *Handbook of Stochastic Methods.* Springer-Verlag, Berlin, 1985.

P. Hänggi and P. Jung. Colored noise in dynamical systems. *Adv. Chem. Phys.*, 89:239, 1995.

F. B. Hanson and H. C. Tuckwell. Diffusion approximation for neuronal activity including synaptic reversal potentials. *J. Theor. Neurobiol.*, 2:127, 1983.

U. Hillenbrand. Subthreshold dynamics of the neural membrane potential driven by stochastic synaptic input. *Phys. Rev. E*, 66:021909, 2002.

A. V. Holden. *Models of the Stochastic Activity of Neurones.* Springer-Verlag, Berlin, 1976.

V. Lánská, P. Lánský, and C. E. Smith. Synaptic transmission in a diffusion model for neural activity. *J. Theor. Biol.*, 166:393, 1994.

P. Lánský and V. Lánská. Diffusion approximation of the neuronal model with synaptic reversal potentials. *Biol. Cybern.*, 56:19, 1987.

M .J. E. Richardson. Effects of synaptic conductance on the voltage distribution and firing rate of spiking neurons. *Phys. Rev. E*, 69:051918, 2004.

M. J. E. Richardson and W. Gerstner. Synaptic shot noise and conductance fluctuations affect the membrane voltage with equal significance. *Neural Comp.*, 17:923, 2005.

H. Risken. *The Fokker-Planck Equation.* Springer, Berlin, 1984.

M. Rudolph and A. Destexhe. Characterization of subthreshold voltage fluctuations in neuronal membranes. *Neural Comp.*, 15:2577, 2003.

M. Rudolph and A. Destexhe. An extended analytical expression for the membrane potential distribution of conductance-based synaptic noise (Note on "*Characterization of subthreshold voltage fluctuations in neuronal membranes*"). *Neural Comp.*, page in press, 2005.

H. C. Tuckwell. *Introduction to Theoretical Neurobiology.* Cambridge University Press, Cambridge, 1988.

H. C. Tuckwell. *Stochastic Processes in the Neuroscience.* Society for industrial and applied mathematics, Philadelphia, Pennsylvania, 1989.